

LED INDOOR LIGHT



CONTENTS

LED Grill Light	P01-P02
LED Panel Light	P03-P08
LED Grill Light	P09-P10
LED Panel Light	P11-P22
LED Grill Light	P23
LED Panel Light Accessories	P24
LED Small Panel Light	P25-P40

CONTENTS

LED Recessed Light	P41-P56
LED Down Light	P57-P82
Fire Rated Down Light	P83-P84
LED Corner Light	P85-P98
LED Track Light	P99-P111
LED Frack Light Accessories	P112
LED Office Light	P113-P122
LED Frame Light	P123-P132





LED-GY6060-30W

UVC information
Philips
TUV 11W FAM




LED-GY6060-30W

(UVC-A) (UVC-B)

3000K 4000K 6500K

AC 220-240V
 ≥80
 30,000h
 -20°+40°
 15,000
 Energy saving
 CE

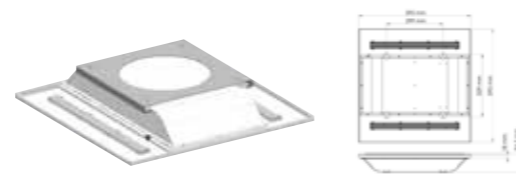

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	UVC Tube	Air circulation	Material	Size [mm]
LED-GY6060-30W(UVC-A)	30W	SMD2835	3600	75°	>0.9	Philips 11w	1.45w	Aluminum	595*595*95
LED-GY6060-30W(UVC-B)	30W	SMD2835	3600	75°	>0.9	Philips 11w	1.45w	Aluminum	595*595*95
LED-GY6060(UVC-A)	11W	/	/	75°	/	Philips 11w	1.45w	Aluminum	595*595*95
LED-GY6060(UVC-B)	11W	/	/	75°	/	Philips 11w	1.45w	Aluminum	595*595*95



LED-GZ6060-30W(UVC-A)

UVC information
Philips
TUV 11W FAM




(UVC-B) (UVC-A)




LED-GX6060(UVC)

3000K 4000K 6500K

AC 220-240V
 ≥80
 30,000h
 -20°+40°
 15,000
 Energy saving
 CE

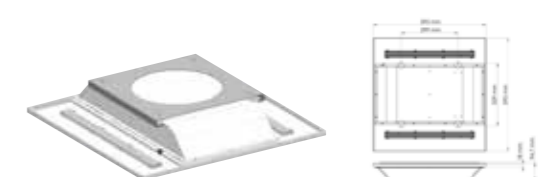


Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	UVC Tube	Air circulation	Material	Size [mm]
LED-GZ6060-30W(UVC-A)	30W	SMD2835	3600	75°	>0.9	Philips 11w	1.45w	Aluminum	595*595*95
LED-GZ6060-30W(UVC-B)	30W	SMD2835	3600	75°	>0.9	Philips 11w	1.45w	Aluminum	595*595*95
LED-GX6060(UVC)	11W	/	/	75°	/	Philips 11w	1.45w	Aluminum	595*595*95

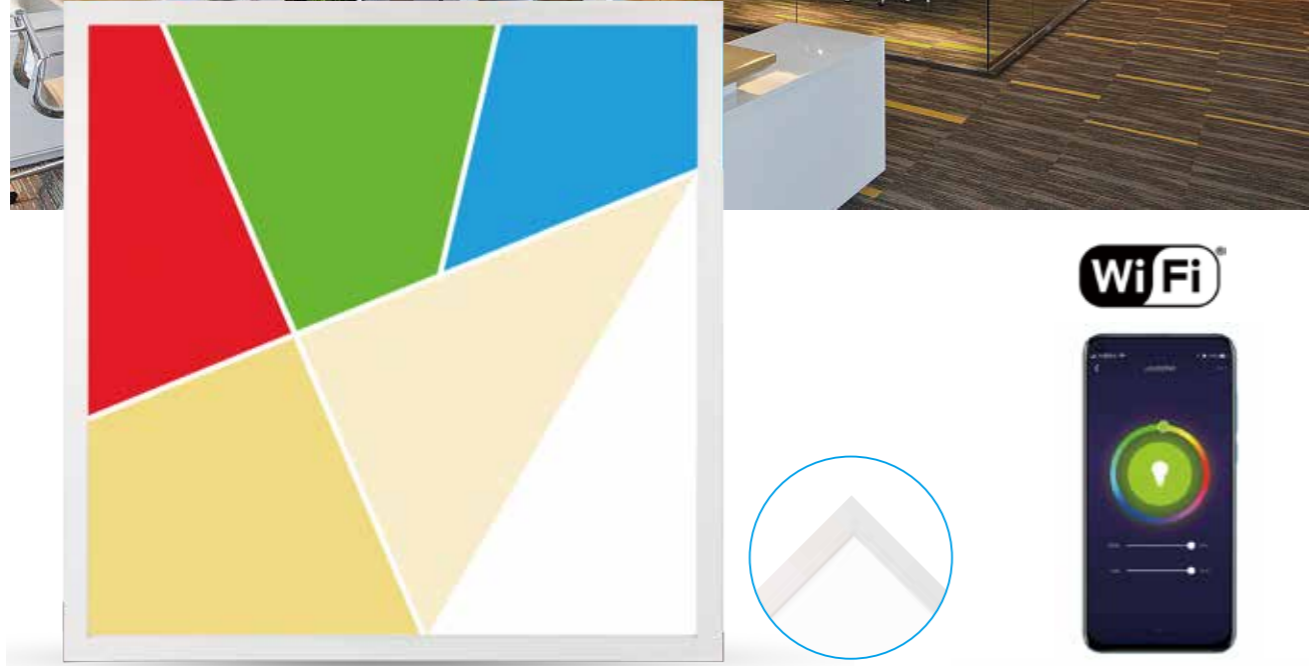


Powered By **tuya** Intelligence Inside
 • WORKS WITH **amazon Alexa** **Google Assistant**

3000K 4000K 6500K

AC 180-265V ≥80 30,000h -20°+40° 15,000 90% Energy saving CE

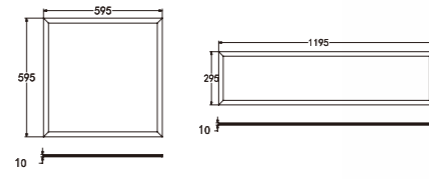

Item No.	Wattage [W]	LED	Beam angle	Power Factor	Color Temperature	Material	Size [mm]
LED-PZN3030-18W	18W	3528+2835SMD	120°	>0.5	RGB+CCT	Aluminum	295*295*10
LED-PZN6060-36W	36W	3528+2835SMD	120°	>0.9	RGB+CCT	Aluminum	595*595*10
LED-PZN30120-36W	36W	3528+2835SMD	120°	>0.9	RGB+CCT	Aluminum	295*1195*10

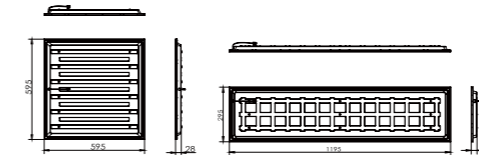


3000K 4000K 6500K

AC 220-265V ≥80 30,000h -20°+40° 15,000 90% Energy saving CE


Powered By **tuya** Intelligence Inside
 • WORKS WITH **amazon Alexa** **Google Assistant**



Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Size [mm]
LED-PZ6060-40W	40W	SMD2835	3600	120°	>0.9	Aluminum	595*595*28
LED-PZ30120-40W	40W	SMD2835	3600	120°	>0.9	Aluminum	295*1195*28

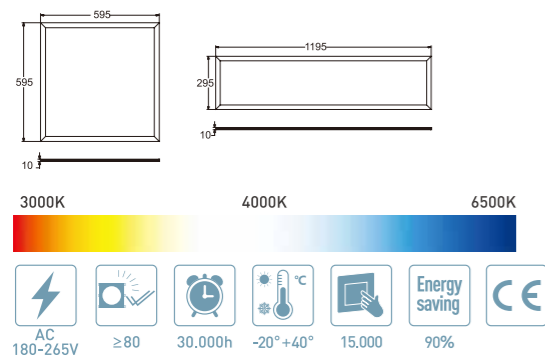

Item No.	Wattage [W]	Lumen [lm]	LED	Beam angle	Material	Size [mm]
LED-PB6060-40W	40W	3600	SMD4014	120°	Aluminum	595*595*10
LED-PB30120-40W	40W	3600	SMD4014	120°	Aluminum	295*1195*10

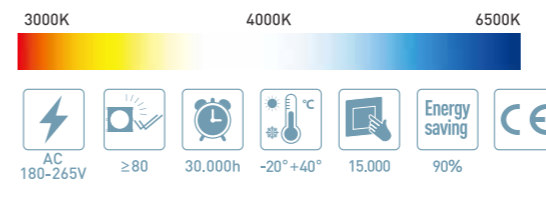


Item No.	Wattage [W]	Lumen [lm]	LED	Beam angle	Power Factor	Material	Size [mm]
LED-PT6060-36W	36W	3600	SMD2835	120°	>0.9	Aluminum	595*595*10
LED-PT30120-36W	36W	3600	SMD2835	120°	>0.9	Aluminum	295*1195*10



3000K 4000K 6500K

- AC 180-265V
- ≥80
- 30,000h
- 20°+40°
- 15,000
- 90%
- Energy saving
- CE



Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Size [mm]
LED-P6060-IP44-36W	36W	SMD2835	3600	120°	>0.9	Aluminum	595*595*11
LED-P30120-IP44-36W	36W	SMD2835	3600	120°	>0.9	Aluminum	295*1195*11
LED-P6060-IP65-36W	36W	SMD2835	3600	120°	>0.9	Aluminum	595*595*11
LED-P30120-IP65-36W	36W	SMD2835	3600	120°	>0.9	Aluminum	295*1195*11



LED-P6060-36W(RGB)



RGB touch model remote



RGB colorful changing



LED-P6060-36W(RGBW)



RGBW touch model controller



RGBW colorful changing



LED-P6060-36W(RGB+CCT)





Handheld Remote Control






RGB+White 2700-6500K

3000K 4000K 6500K



- AC 180-265V
- ≥80
- 30,000h
- 20°+40°
- 15,000
- 90%
- Energy saving
- CE

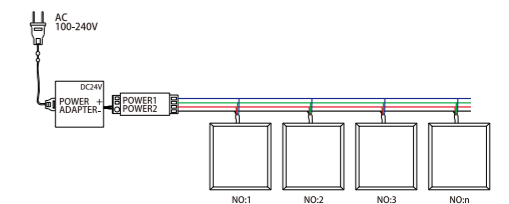

Item No.	Wattage [W]	LED	Beam angle	Color Temperature	Material	Size [mm]
LED-P6060-36W(RGB)	36W	SMD3528	120°	RGB	Aluminum	595*595*10
LED-P6060-36W(RGBW)	36W	SMD5050	120°	RGBW	Aluminum	595*595*10
LED-P6060-36W(RGB+CCT)	36W	SMD3528	120°	RGB+CCT	Aluminum	595*595*10





Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Size [mm]
LED-GF6060-30W	30W	SMD2835	3300	68°	>0.9	Aluminum	595*595*34
LED-GF30120-30W	30W	SMD2835	3300	68°	>0.9	Aluminum	295*1195*34

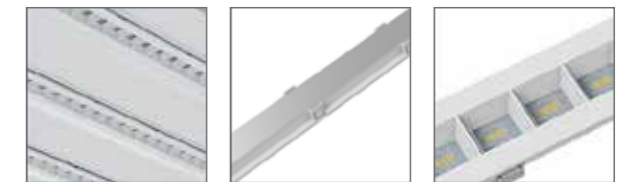




Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Size [mm]
LED-GT6060-40W	40W	SMD2835	4000	75°	>0.9	Aluminum	595*595*18
LED-GU6060-40W	40W	SMD2835	4000	75°	>0.9	Aluminum	595*595*18
LED-GT30120-40W	40W	SMD2835	4000	75°	>0.9	Aluminum	295*1195*18
LED-GU30120-40W	40W	SMD2835	4000	75°	>0.9	Aluminum	295*1195*18




70%
DOWNLIGHT



Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Size [mm]
LED-PD6060-40W	40W	SMD2835	4000	120°	>0.9	Aluminum	595*595*11
LED-PD30120-40W	40W	SMD2835	4000	120°	>0.9	Aluminum	295*1195*11

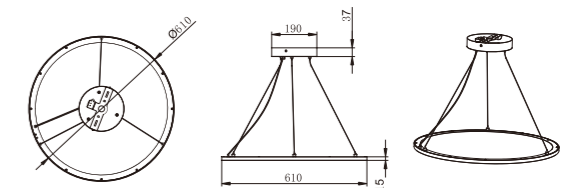

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Size [mm]
LED-PD610-40W-R	40W	SMD2835	4300	120°	>0.9	Aluminum	D610*H15
LED-PD610-50W-R	50W	SMD2835	5300	120°	>0.9	Aluminum	D610*H15

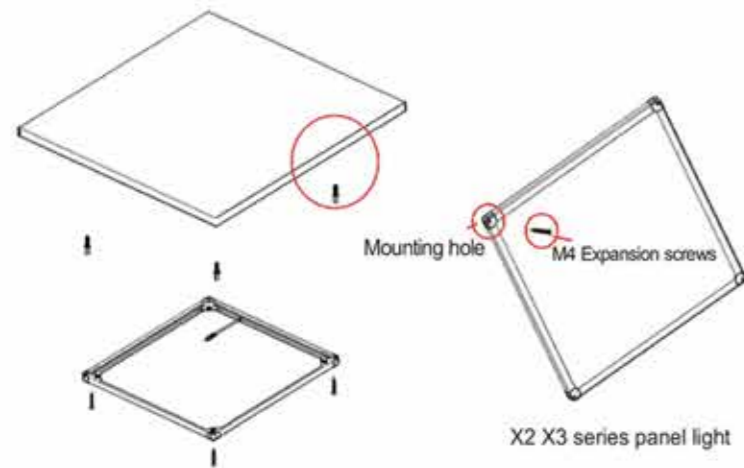

But now ,only one step,just use 4 screws to screw the four corner of our slim surfaced mounted panel light to the ceiling



◀ Another big advantage is , when been installed on the uneven wall , the recessed panel light will be uneven in the surfaced mounted kit.

VS

But our light seems very even. ▶




old

new




There are 4 decorative lids , to cover the 4 corner screw holes,make the light more beautiful

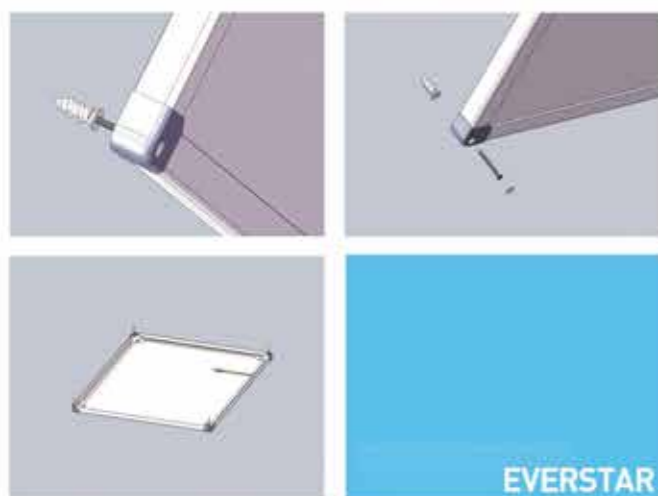

3000K 4000K 6500K

AC 180-265V ≥80 30.000h -20°+40° 15.000 90% Energy saving CE



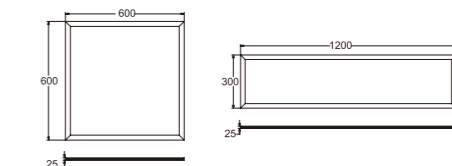


Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Size [mm]
LED-PA6060-40W	40W	SMD4014	3600	120°	>0.9	Aluminum	595*595*25
LED-PA30120-40W	40W	SMD4014	3600	120°	>0.9	Aluminum	295*1195*25



LIFUD




3000K 4000K 6500K



Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Size [mm]
LED-PYA6060-36W	36W	SMD4014	3240	120°	>0.9	Aluminum	595*595*30





3000K 4000K 6500K



Item No.	Wattage [W]	Lumen [lm]	LED	Beam angle	Power Factor	Material	Size [mm]
LED-PYB6060-40W	40W	3200	SMD4014	120°	>0.9	Aluminum	595*595*12





UGR<16 / UGR<19

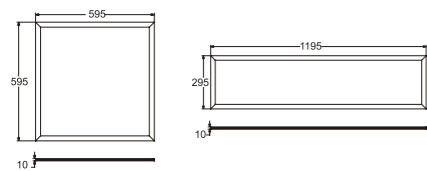



Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Size [mm]
LED-P6060-40W(UGR<19)	40W	SMD4014	4000	120°	>0.9	Aluminum	595*595*10
LED-P30120-40W(UGR<19)	40W	SMD4014	4000	120°	>0.9	Aluminum	295*1195*10
LED-P6060-40W(UGR<16)	40W	SMD4014	3600	120°	>0.9	Aluminum	595*595*10
LED-P30120-40W(UGR<16)	40W	SMD4014	3600	120°	>0.9	Aluminum	295*1195*10



80 LM/W
100 LM/W
120 LM/W

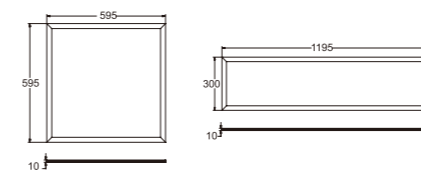

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Size [mm]
LED-P6060-40W	40W	SMD4014	3200/4000	120°	>0.9	Aluminum	595*595*10
LED-P30120-40W	40W	SMD4014	3200/4000	120°	>0.9	Aluminum	295*1195*10
LED-P6060-40W	40W	SMD2835	4800	120°	>0.9	Aluminum	595*595*10
LED-P30120-40W	40W	SMD2835	4800	120°	>0.9	Aluminum	295*1195*10

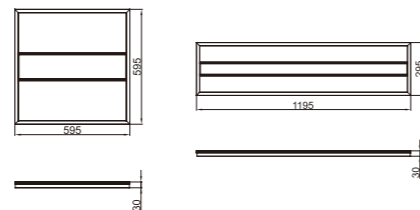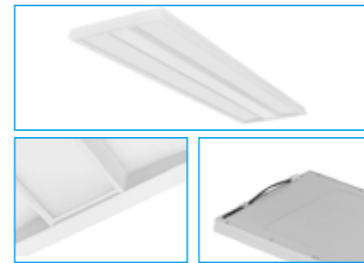

3000K 4000K 6500K


Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Size [mm]
LED-PHD6060-40W	40W	SMD4014	4000	120°	>0.9	Aluminum	595*595*30




LED-PR600(Recessed)






LED-PRM600(Surface)



3000K 4000K 6500K

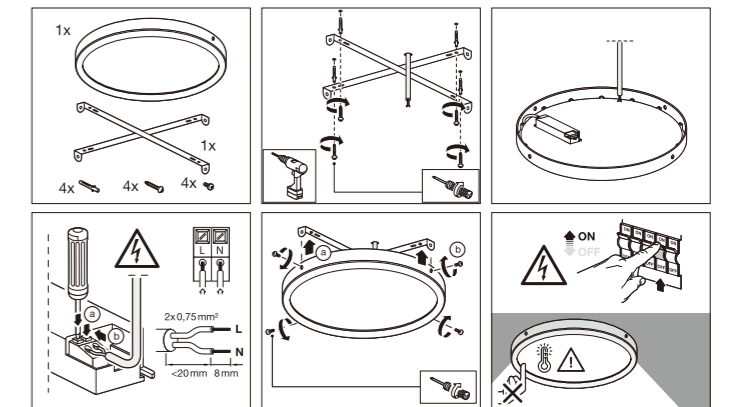

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Size [mm]
LED-PR600-48W	48W	SMD2835	3840	120°	>0.9	Aluminum	D600*H30
LED-PRM600-48W	48W	SMD2835	3840	120°	>0.9	Aluminum	D600*H38

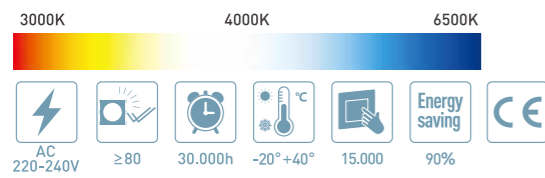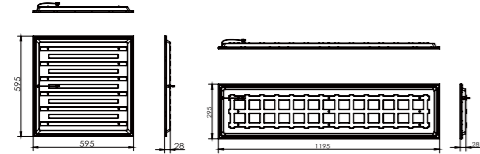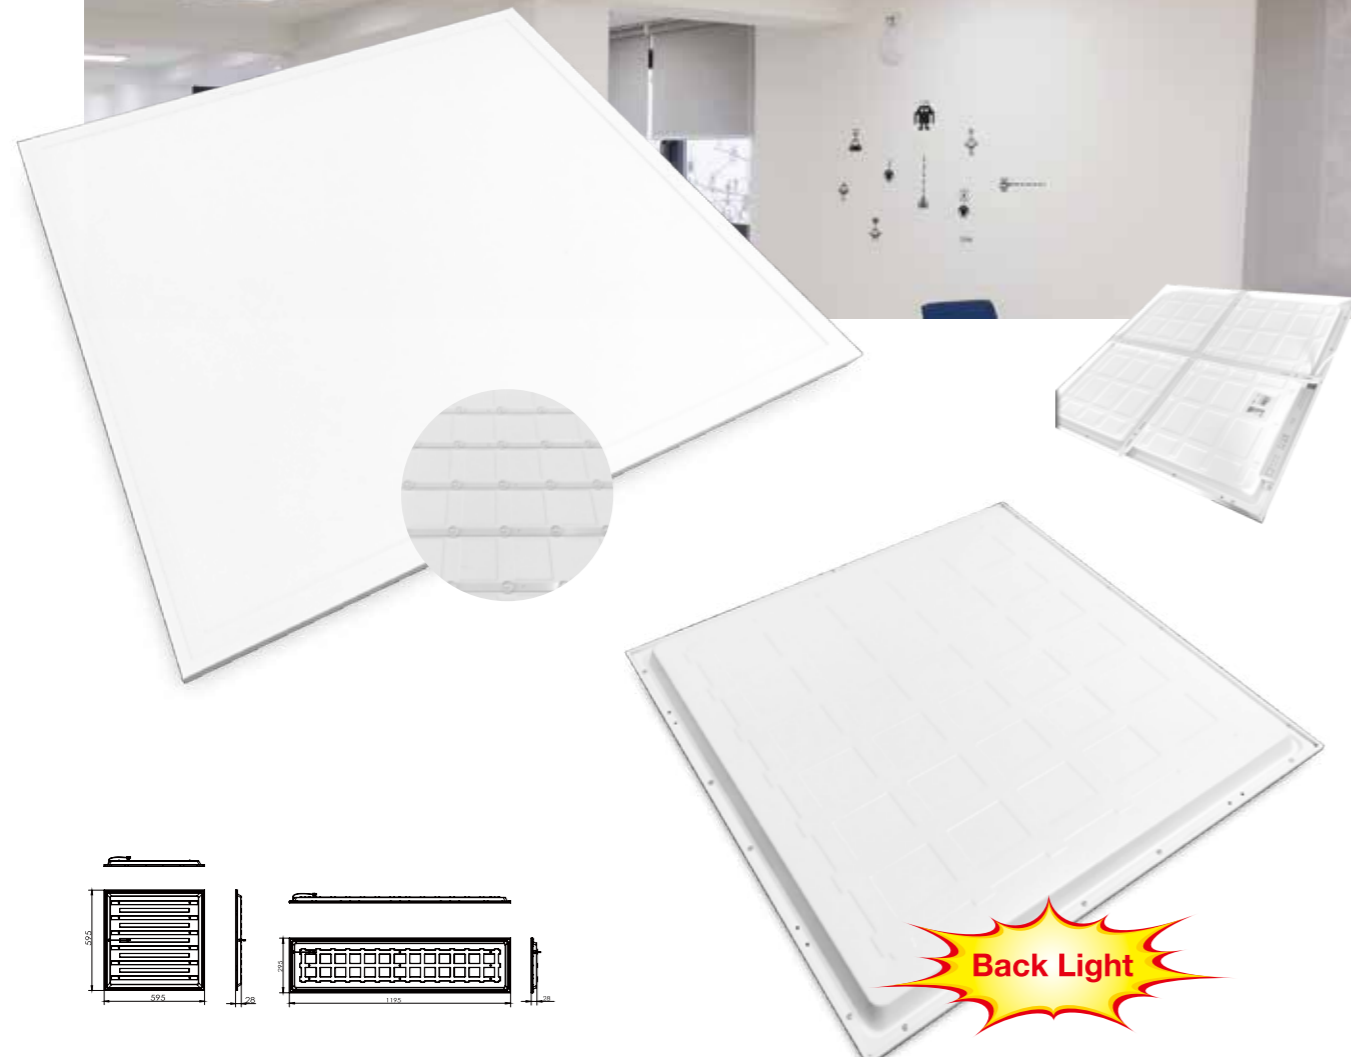

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Size [mm]
LED-PZ6060-40W	40W	SMD2835	3600	120°	>0.9	Aluminum	595*595*28
LED-PZ30120-40W	40W	SMD2835	3600	120°	>0.9	Aluminum	295*1195*28




LED-GZ6060-40W





LED-GZ6060-40W(CCT-A)



LED-GZ6060-40W(CCT-B)



LED-GZ6060-40W(CCT-C)

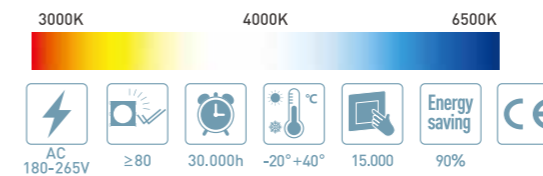


Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Size [mm]
LED-GZ6060-40W	40W	SMD2835	4000	108°	>0.9	Aluminum	595*595*30
LED-GZ6060-40W(CCT-A)	40W	SMD2835	4000	108°	>0.9	Aluminum	595*595*30
LED-GZ6060-40W(CCT-B)	40W	SMD2835	4000	108°	>0.9	Aluminum	595*595*30
LED-GZ6060-40W(CCT-C)	40W	SMD2835	4000	108°	>0.9	Aluminum	595*595*30




LED-GA6060-36W




LED-GB6060-36W




Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Size [mm]
LED-GA6060-36W	36W	SMD2835	3240	160°	>0.9	Steel+PC	595*595*70
LED-GA30120-36W	36W	SMD2835	3240	160°	>0.9	Steel+PC	295*1195*70
LED-GB6060-36W	36W	SMD2835	3240	160°	>0.9	Steel+PC	595*595*70
LED-GB30120-36W	36W	SMD2835	3240	160°	>0.9	Steel+PC	295*1195*70

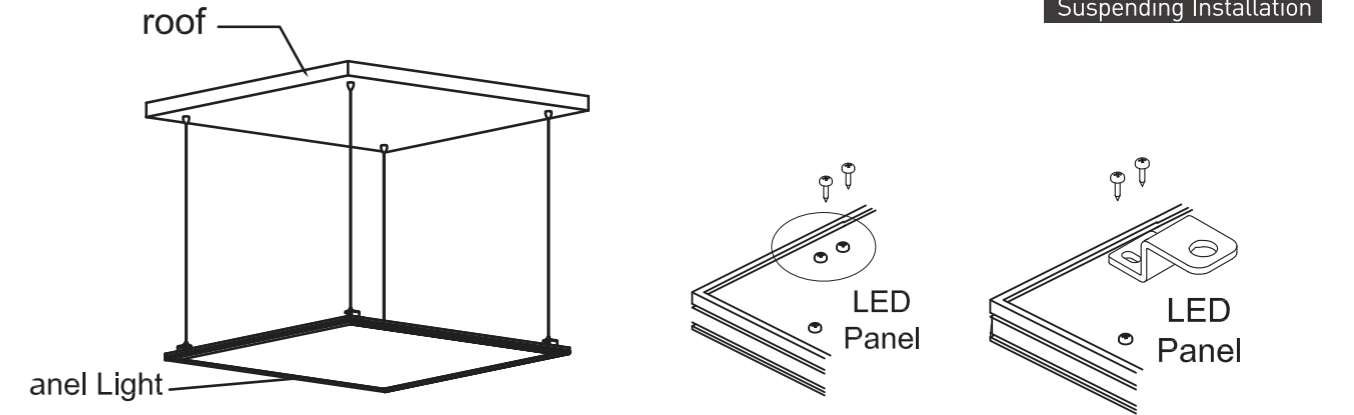


Suspending Installation

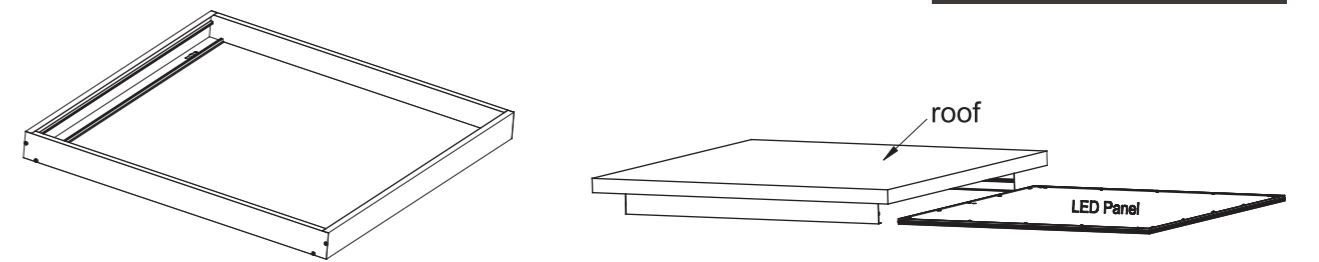



Surfaced Mounted Installation

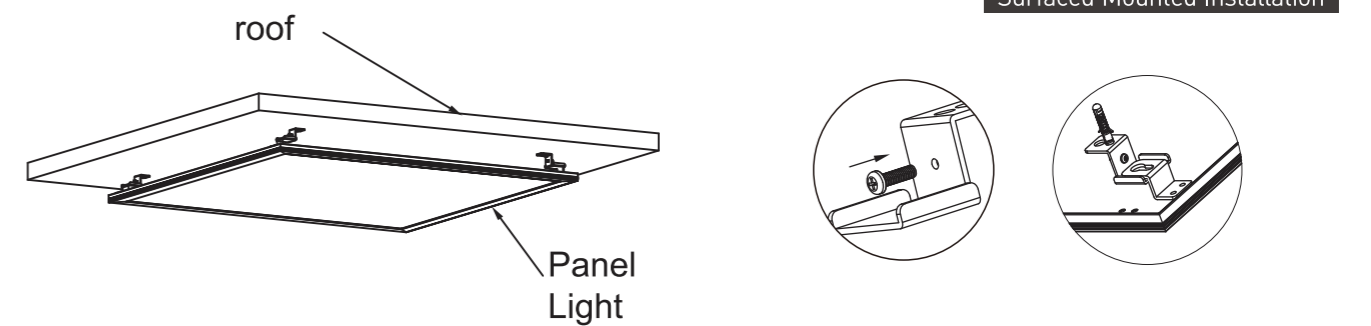

Surfaced Mounted Installation

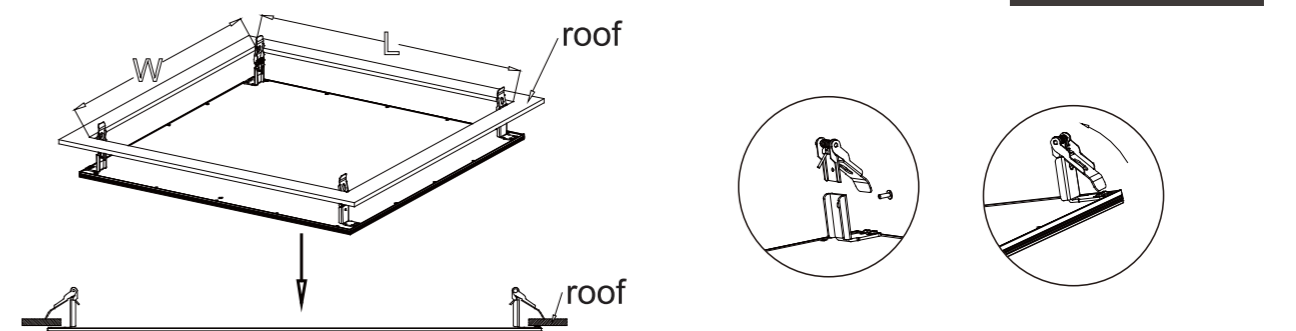


Recessed Installation

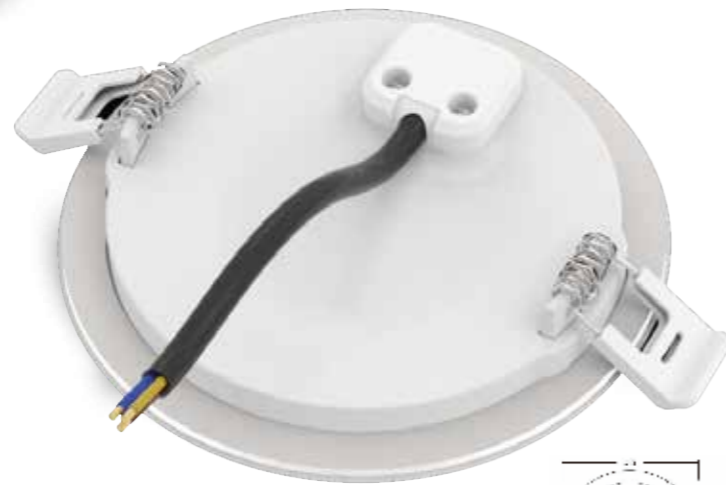

3000K 4000K 6500K


AC 180-265V ≥80 30,000h -20°+40° 15,000 90% Energy saving CE

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-PL-6W	6W	SMD2835	420	120°	>0.5	Aluminum	D110	D122*H21
LED-PL-12W	12W	SMD2835	900	120°	>0.5	Aluminum	D160	D173*H21
LED-PL-18W	18W	SMD2835	1440	120°	>0.5	Aluminum	D205	D220*H21

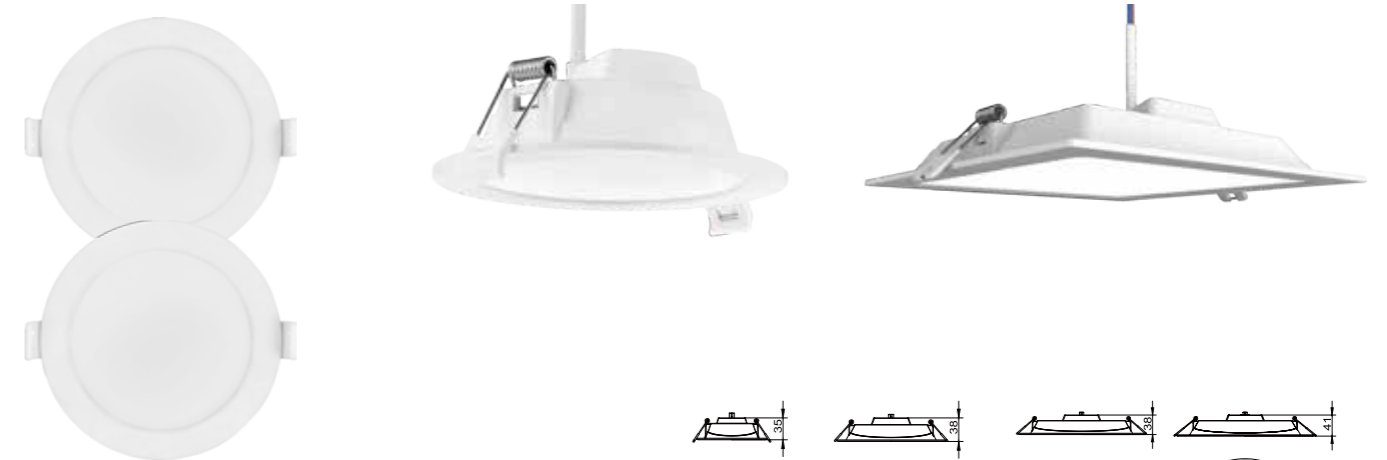


3000K 4000K 6500K

AC 220-240V ≥80 30,000h -20°+40° 15,000 90% Energy saving CE

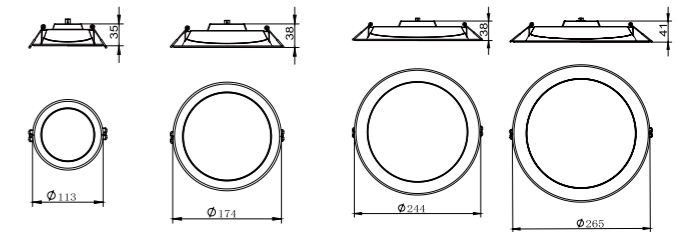

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-PLD-6W (R)	6W	SMD2835	510	120°	>0.5	PC	D100	D113*H35
LED-PLD-12W (R)	12W	SMD2835	1020	120°	>0.5	PC	D150	D174*H38
LED-PLD-18W (R)	18W	SMD2835	1530	120°	>0.5	PC	D205	D224*H38
LED-PLD-20W (R)	20W	SMD2835	1700	120°	>0.5	PC	D225	D265*H41
LED-PLD-6W (S)	6W	SMD2835	510	120°	>0.5	PC	105*105	120*120*35
LED-PLD-12W (S)	12W	SMD2835	1020	120°	>0.5	PC	155*155	170*170*38
LED-PLD-18W (S)	18W	SMD2835	1530	120°	>0.5	PC	205*205	220*220*45

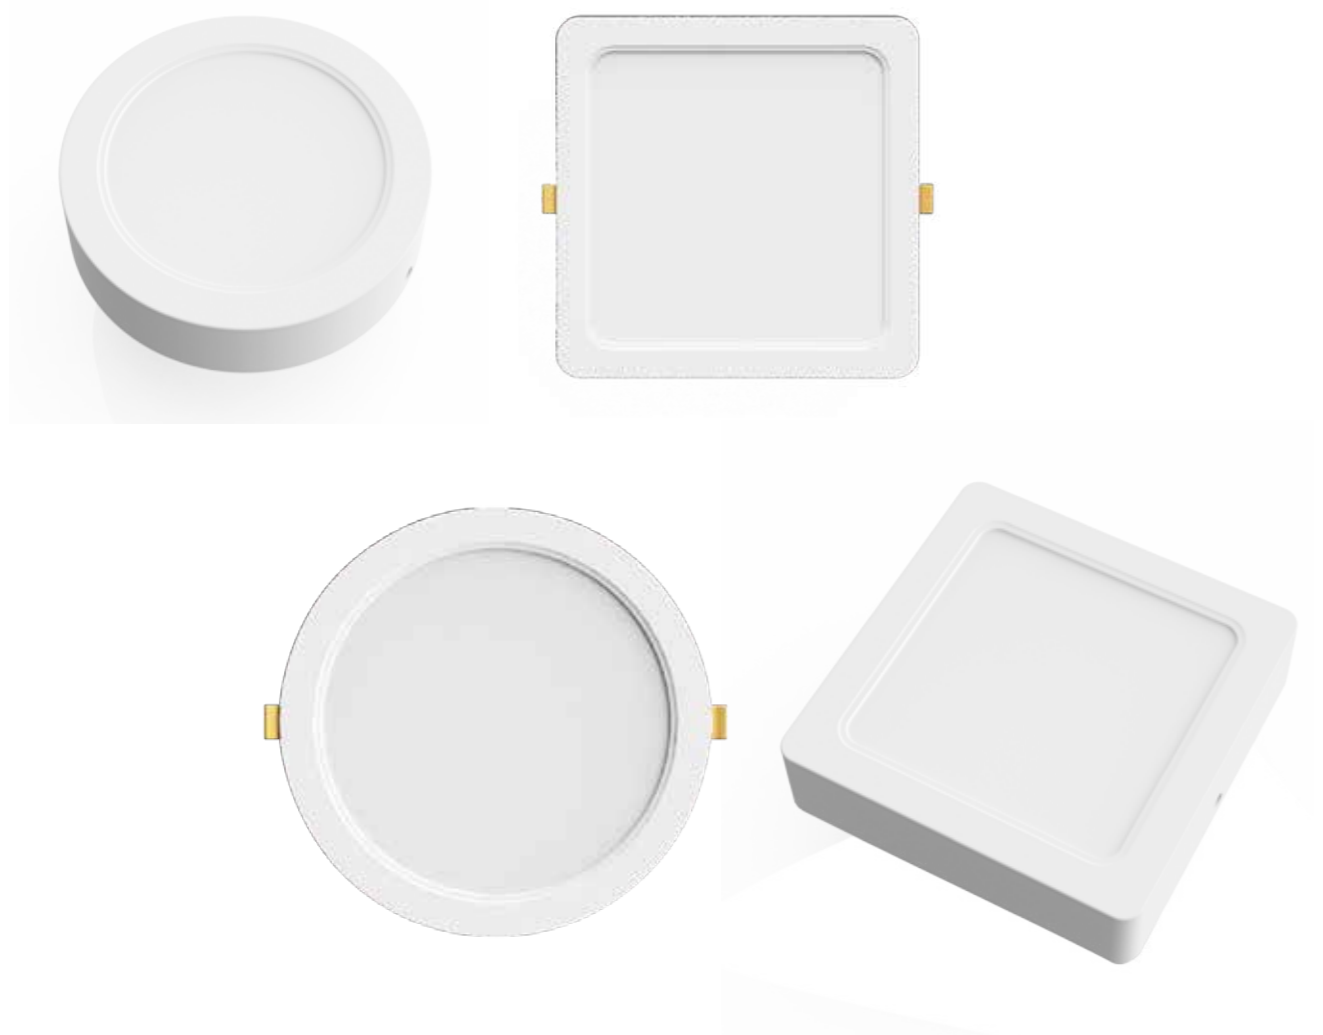

3000K 4000K 6500K

Item No.	Wattage [W]	LED	Beam angle	Color Temperature	Material	Size [mm]	Cut Hole Size [mm]
LED-PL261-5W	5W	SMD2835	120°	3000K/4000K/6000K	Plastic	Φ95*26	Φ75-90
LED-PL262-9W	9W	SMD2835	120°	3000K/4000K/6000K	Plastic	Φ120*26	Φ90-110
LED-PL263-12W	12W	SMD2835	120°	3000K/4000K/6000K	Plastic	Φ145*26	Φ120-135
LED-PL265-18W	18W	SMD2835	120°	3000K/4000K/6000K	Plastic	Φ170*26	Φ140-160
LED-PL266-24W	24W	SMD2835	120°	3000K/4000K/6000K	Plastic	Φ220*26	Φ190-210
LED-PL271-5W	5W	SMD2835	120°	3000K/4000K/6000K	Plastic	Φ95*26	Φ75-90
LED-PL272-9W	9W	SMD2835	120°	3000K/4000K/6000K	Plastic	Φ120*26	Φ90-110
LED-PL273-12W	12W	SMD2835	120°	3000K/4000K/6000K	Plastic	Φ145*26	Φ120-135
LED-PL275-18W	18W	SMD2835	120°	3000K/4000K/6000K	Plastic	Φ170*26	Φ140-160
LED-PL276-24W	24W	SMD2835	120°	3000K/4000K/6000K	Plastic	Φ220*26	Φ190-210



CCT Changeable




IP 54

Item No.	Wattage [W]	LED	Lumen	Beam angle	Power Factor	Material	Size [mm]
LED-PLDFA-5W	5W	SMD2835	500LM	120°	0.5	PC	95*95*26
LED-PLDFA-9W	9W	SMD2835	900LM	120°	0.5	PC	120*120*26
LED-PLDFA-12W	12W	SMD2835	1200LM	120°	0.5	PC	145*145*26
LED-PLDFA-18W	18W	SMD2835	1800LM	120°	0.5	PC	170*170*26
LED-PLDFA-24W	24W	SMD2835	2400LM	120°	0.5	PC	220*220*26



3000K 4000K 6500K

AC 100-240V ≥80 30,000h -20°+40° 15,000 90% Energy saving CE

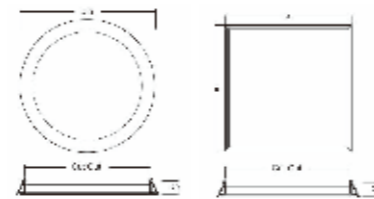


Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-PLR-3W	3W	SMD2835	150	120°	>0.5	Aluminum	D75	D85*H20
LED-PLR-6W(M)	6W	SMD2835	360	120°	>0.5	Aluminum	D110	D120*H20
LED-PLR-9W	9W	SMD2835	585	120°	>0.5	Aluminum	D135	D145*H20
LED-PLR-12W(M)	12W	SMD2835	840	120°	>0.5	Aluminum	D160	D170*H20
LED-PLR-15W	15W	SMD2835	1050	120°	>0.5	Aluminum	D185	D200*H20
LED-PLR-18W(M)	18W	SMD2835	1260	120°	>0.5	Aluminum	D205	D225*H20
LED-PLR-24W(M)	24W	SMD2835	1680	120°	>0.5	Aluminum	D280	D300*H20



3000K 4000K 6500K

AC 100-240V ≥80 30,000h -20°+40° 15,000 90% Energy saving CE

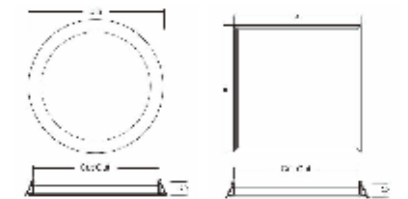

Item No.	Wattage [W]	LED	Beam angle	Lumen [lm]	Power Factor	Material	Cut out [mm]	Size [mm]
LED-TPR-3+3W	3+3W	SMD2835	120°	150	>0.5	Aluminum+PMMA	D82	D105*H28
LED-TPR-6+3W	6+3W	SMD2835	120°	400	>0.5	Aluminum+PMMA	D120	D145*H28
LED-TPR-12+4W	12+4W	SMD2835	120°	800	>0.5	Aluminum+PMMA	D170	D195*H28
LED-TPR-18+6W	18+6W	SMD2835	120°	1200	>0.5	Aluminum+PMMA	D220	D240*H28



IP20/IP54



CCT Changeable



3000K 4000K 6500K

Item No.	Wattage [W]	LED	Lumen	Beam angle	Power Factor	Material	Size [mm]	Cut out [mm]
LED-PLDFG-5W(R/S)	5W	SMD2835	600LM	120°	0.5	Plastic	Φ95*26	Φ75-90
LED-PLDFG-9W(R/S)	9W	SMD2835	1080LM	120°	0.5	Plastic	Φ120*26	Φ90-110
LED-PLDFG-12W(R/S)	12W	SMD2835	1440LM	120°	0.5	Plastic	Φ145*26	Φ120-135
LED-PLDFG-18W(R/S)	18W	SMD2835	2160LM	120°	0.5	Plastic	Φ170*26	Φ140-160
LED-PLDFG-24W(R/S)	24W	SMD2835	2880LM	120°	0.5	Plastic	Φ220*26	Φ190-210






UGR<19






CCT Changeable

3000K 4000K 6500K

Item No.	Wattage [W]	LED	Lumen	Beam angle	Power Factor	Material	Size [mm]	Cut out [mm]
LED-PLDFG-5W(UGR)	5W	SMD2835	600LM	120°	0.5	Plastic	Φ95*26	Φ75-90
LED-PLDFG-9W(UGR)	9W	SMD2835	1080LM	120°	0.5	Plastic	Φ120*26	Φ90-110
LED-PLDFG-12W(UGR)	12W	SMD2835	1440LM	120°	0.5	Plastic	Φ145*26	Φ120-135
LED-PLDFG-18W(UGR)	18W	SMD2835	2160LM	120°	0.5	Plastic	Φ170*26	Φ140-160
LED-PLDFG-24W(UGR)	24W	SMD2835	2880LM	120°	0.5	Plastic	Φ220*26	Φ190-210

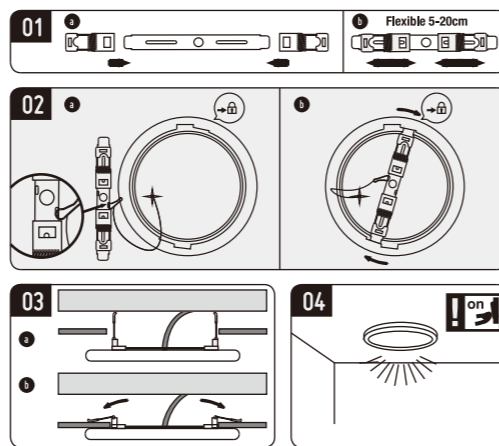

Item No.	Wattage [W]	LED	Lumen	Beam angle	Power Factor	Material	Size [mm]	Cut out [mm]
LED-PLLD-9W(R/S)	9W	SMD2835	630LM	120°	0.5	Plastic	Φ155*20	Φ70-100
LED-PLLD-12W(R/S)	12W	SMD2835	960LM	120°	0.5	Plastic	Φ175*20	Φ70-120
LED-PLLD-18W(R/S)	18W	SMD2835	1620LM	120°	0.5	Plastic	Φ225*20	Φ70-170
LED-PLLD-24W(R/S)	24W	SMD2835	2160LM	120°	0.5	Plastic	Φ300*20	Φ70-240

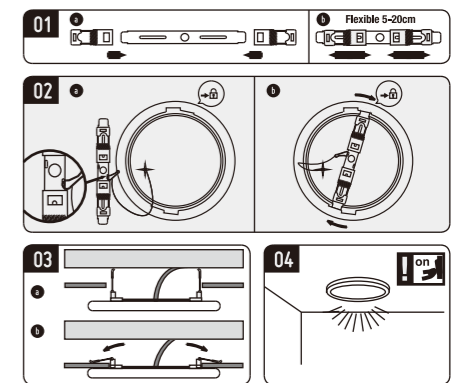



Item No.	Wattage [W]	Sensor	Lumen	Beam angle	Power Factor	Material	Size [mm]	Cut out [mm]
LED-PLRB-DP-12W(R/S)	8/12W	NO	600/960LM	120°	0.9	Plastic	Φ180*20.5	Φ80-160
LED-PLRB-DP-18W(R/S)	12/18W	NO	1080/1710LM	120°	0.9	Plastic	Φ220*21.5	Φ120-200
LED-PLRB-DP-25W(R/S)	18/25W	NO	1710/2375LM	120°	0.9	Plastic	Φ300*25	Φ150-270

LED Small Panel Light



CCT
Changeable

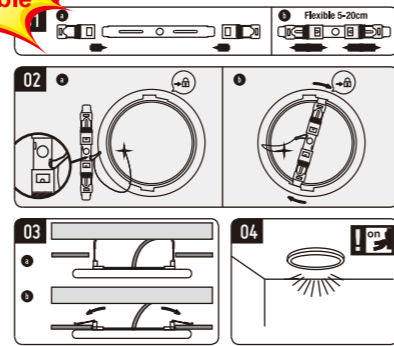



Item No.	Wattage [W]	LED	Lumen	Beam angle	Power Factor	Material	Size [mm]	Cut out [mm]
LED-PLRB-TW-18W(R/S)	18W	SMD2835	1440LM	120°	0.9	Plastic	Φ2200*21,5	Φ120-200
LED-PLRB-TW-25W(R/S)	25W	SMD2835	2125LM	120°	0.9	Plastic	Φ300*25	Φ150-270

LED Small Panel Light



CCT
Changeable

Power
Changeable



Item No.	Wattage [W]	LED	Lumen	Beam angle	Power Factor	Material	Size [mm]
LED-PLMZ-18W(R/S)	12/15/18W	SMD2835	950/1150/1350LM	120°	0.5	Aluminum+PC	Φ120*33





UGR<19



3000K 4000K 6500K

AC 220-240V ≥80 30,000h -20°+40° 15,000 90% Energy saving CE

Item No.	Wattage [W]	LED	Lumen	Beam angle	Power Factor	Material	Size [mm]
LED-PL2508C-10W	10W	SMD2835	1000LM	120°	0.5	Aluminum+PC	90*90*35
LED-PL2508C-15W	15W	SMD2835	1500LM	120°	0.5	Aluminum+PC	120*120*35
LED-PL2508C-22W	22W	SMD2835	2200LM	120°	0.5	Aluminum+PC	170*170*35
LED-PL2508C-32W	32W	SMD2835	3200LM	120°	0.5	Aluminum+PC	225*225*35

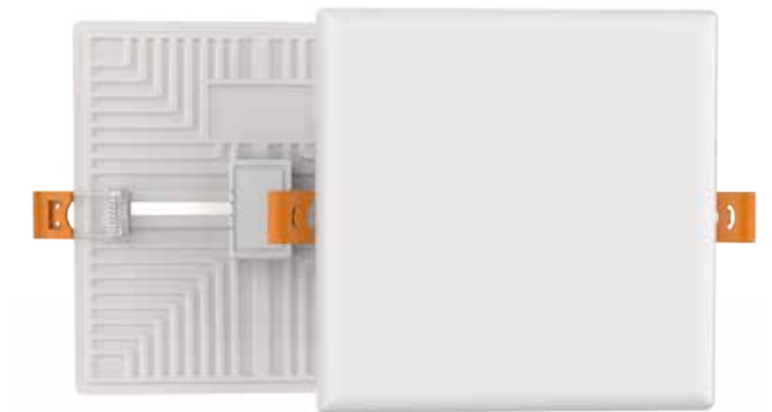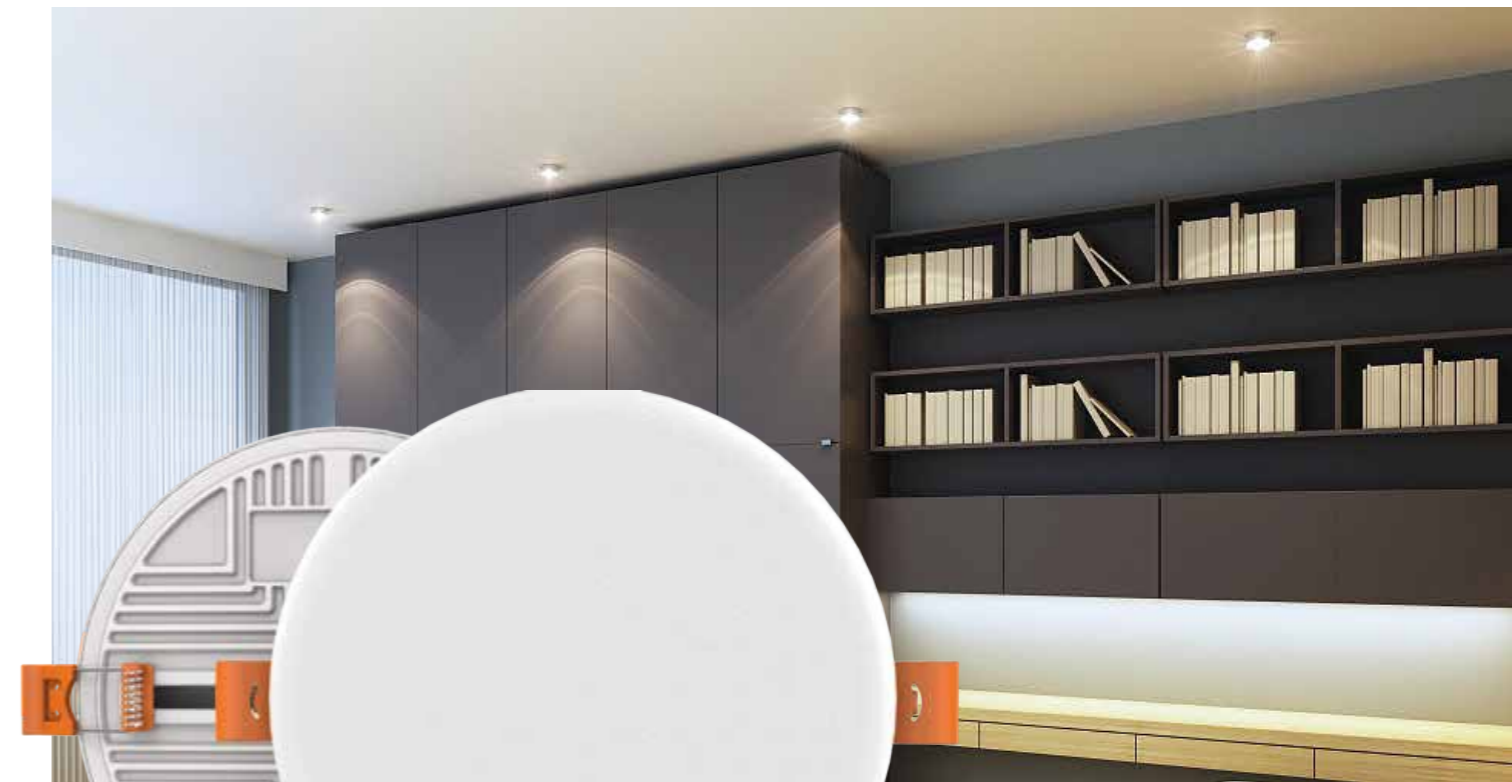

3000K 4000K 6500K

AC 220-240V ≥80 30,000h -20°+40° 15,000 90% Energy saving CE

Item No.	Wattage [W]	LED	Lumen	Beam angle	Power Factor	Material	Size [mm]
LED-PL2508A-10W	10W	SMD2835	1000LM	120°	0.5	Aluminum+PC	100*100*20
LED-PL2508A-15W	15W	SMD2835	1500LM	120°	0.5	Aluminum+PC	120*120*20
LED-PL2508A-22W	22W	SMD2835	2200LM	120°	0.5	Aluminum+PC	170*170*20
LED-PL2508A-32W	32W	SMD2835	3200LM	120°	0.5	Aluminum+PC	225*225*20



LED-RA10-1W




LED-RP06-3W



LED-RP05-1W



LED-RA09-1W

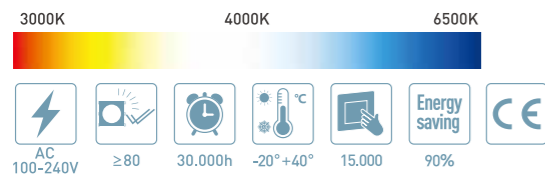

Item No.	Wattage [W]	LED	Lumen [lm]	Material	Cut out [mm]	Size [mm]
LED-RP05-1W	1W	COB	30	PC	D45	D52.5*H20
LED-RP06-3W	3W	COB	90	PC	D45	D52.5*H20
LED-RA09-1W	1W	COB	30	PC	D30	D32*H20
LED-RA10-1W	1W	COB	30	PC	D30	D32*H20



LED-RA12-3W



LED-RA13-3W




LED-RA15-3W



LED-RA11-3W



LED-RA14-3W

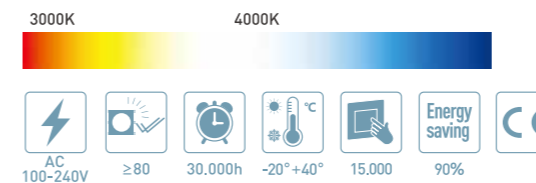

Item No.	Wattage [W]	LED	Lumen [lm]	Material	Cut out [mm]	Size [mm]
LED-RA11-3W	3W	COB	90	Aluminum	D34	D41*H40
LED-RA12-3W	3W	COB	90	Aluminum	D45	D52.5*H33
LED-RA13-3W	3W	COB	90	Aluminum	D35	D48*H24
LED-RA14-3W	3W	COB	90	Aluminum	D38	D48*H33
LED-RA15-3W	3W	COB	90	Aluminum	D38	D43*H26



LED-RA16-1W



LED-RA18-1W



LED-RA17-1W



LED-RA16-3W



Item No.	Wattage [W]	LED	Lumen [lm]	Material	Cut out [mm]	Size [mm]
LED-RA16-1W	1W	COB	30	Aluminum	D25	D35*H25
LED-RA16-3W	3W	COB	90	Aluminum	D30	D40*H26
LED-RA17-1W	1W	COB	30	Aluminum	D27	D30*H19
LED-RA18-1W	1W	COB	30	Aluminum	D27	30*30*19



LED-RA21-2W



LED-RA19-3W



LED-RA23-2W



LED-RA24-2W



LED-RA20-3W



LED-RA22-2W



Item No.	Wattage [W]	LED	Lumen [lm]	Material	Cut out [mm]	Size [mm]
LED-RA19-3W	3W	COB	120	Aluminum	D35	D40*H25
LED-RA20-3W	3W	COB	120	Aluminum	D35	40*40*25
LED-RA21-2W	2W	COB	60	Aluminum	D30	D39*H26
LED-RA22-2W	2W	COB	60	Aluminum	D30	35*35*26
LED-RA23-2W	2W	COB	60	Aluminum	D30	D35*H26
LED-RA24-2W	2W	COB	60	Aluminum	D30	35*35*26



3000K 4000K 6500K

Item No.	Wattage [W]	LED	Lumen [lm]	Material	Cut out [mm]	Size [mm]
LED-RA25-3W	3W	COB	120	Aluminum	D45	D50*H37
LED-RA26-3W	3W	COB	120	Aluminum	D45	50*50*37
LED-RA27-3W	3W	COB	90	Aluminum	D45	D50*H37
LED-RA28-3W	3W	COB	90	Aluminum	D45	50*50*37



3000K 4000K 6500K

Item No.	Wattage [W]	LED	Lumen [lm]	Material	Cut out [mm]	Size [mm]
LED-RA29-3W/5W	3W/5W	COB	150/250	Aluminum	D55	D67*H54
LED-RA30-3W/5W	3W/5W	COB	150/250	Aluminum	D55	D67*H54
LED-RA31-3W/5W	3W/5W	COB	150/250	Aluminum	D55	67*67*54
LED-RA32-3W/5W	3W/5W	COB	150/250	Aluminum	D55	67*67*54



3000K 4000K 6500K

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-R102-6W	6W	SMD2835	360	120°	>0.5	Iron	D65	D78*H40
LED-R103-6W	6W	SMD2835	360	120°	>0.5	Iron	D65	78*78*40
LED-R104-6W	6W	SMD2835	360	120°	>0.5	Iron	D70	D84*H40
LED-R105-6W	6W	SMD2835	360	120°	>0.5	Iron	D70	84*84*40




3000K 4000K 6500K

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-R106-12W	12W	SMD2835	720	120°	>0.5	Iron	D85	D145*H45
LED-R107-6W	6W	SMD2835	360	120°	>0.5	ABS+Iron	D65	D82*H40
LED-R108-6W	6W	SMD2835	360	120°	>0.5	ABS+Iron	D65	82*82*40
LED-R109-6W	6W	SMD2835	360	120°	>0.5	Glass+Iron	D65	D97*H60



3000K 4000K 6500K

Item No.	Wattage [W]	LED	Lumen [lm]	Material	Power Factor	Beam angle	Cut out [mm]	Size [mm]
LED-RZ01-5W	5W	SMD2835	450	Zinc	>0.5	120°	D60	D75*H33
LED-RZ02-5W	5W	SMD2835	450	Zinc	>0.5	120°	D60	75*75*33
LED-RZ03-5W	5W	SMD2835	450	Zinc	>0.5	120°	D75	D82*26
LED-RZ04-5W	5W	SMD2835	450	Zinc	>0.5	120°	D75	82*82*26

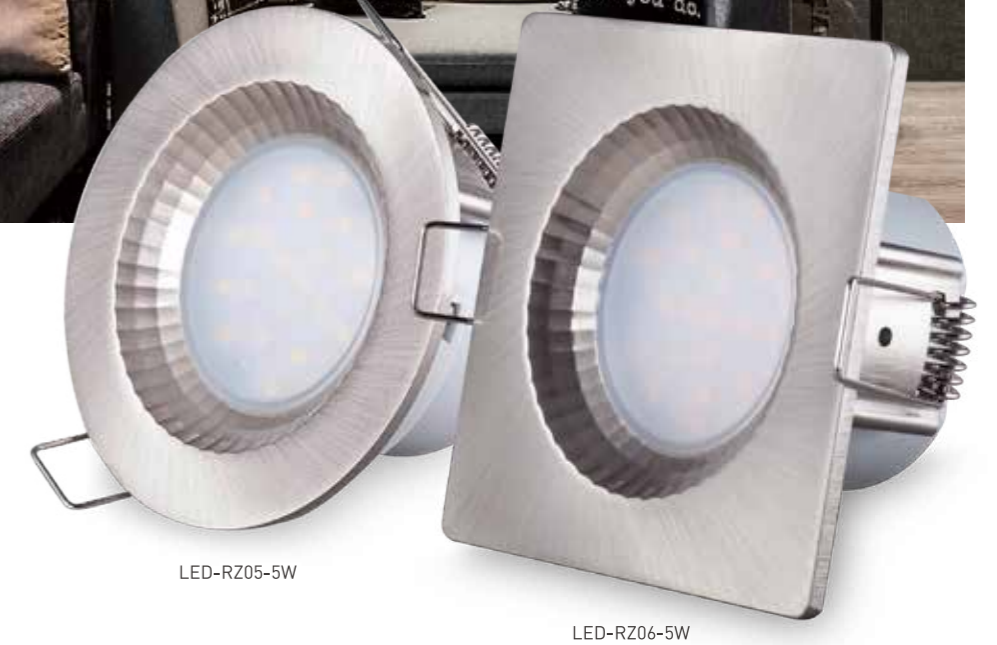

3000K 4000K 6500K

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-RZ05-5W	5W	SMD2835	430	120°	>0.5	Zinc	D68	D85*H45
LED-RZ06-5W	5W	SMD2835	430	120°	>0.5	Zinc	D68	85*85*45





CCT Changeable

3000K 4000K 6500K

AC 220-240V ≥80 30.000h -20°+40° 15.000 90% CE

Detachable Module

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-RA01S-5W	5W	SMD2835	400	120°	>0.5	Aluminum	D65	D78*H40
LED-RA02S-7W	7W	SMD2835	560	120°	>0.5	Aluminum	D65	D78*H40
LED-RA03S-5W	5W	SMD2835	400	120°	>0.5	Aluminum	D65	75*75*40
LED-RA04S-7W	7W	SMD2835	560	120°	>0.5	Aluminum	D65	75*75*40



WiFi

Powered By **tuya** Intelligence Inside

WORKS WITH **amazon Alexa** **Google Assistant**

3000K 4000K 6500K

AC 220-240V ≥80 30.000h -20°+40° 15.000 90% CE

Detachable Module

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-RA01S-5W	5W	SMD2835	400	120°	>0.5	Aluminum	D65	D78*H40
LED-RA02S-7W	7W	SMD2835	560	120°	>0.5	Aluminum	D65	D78*H40
LED-RA03S-5W	5W	SMD2835	400	120°	>0.5	Aluminum	D65	75*75*40
LED-RA04S-7W	7W	SMD2835	560	120°	>0.5	Aluminum	D65	75*75*40




LED-RA01-5W
LED-RA02-7W



LED-RA03-5W
LED-RA04-7W



3000K 4000K 6500K




Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-RA01-5W	5W	SMD2835	400	120°	>0.5	Aluminum	D75	D84*H40
LED-RA02-7W	7W	SMD2835	560	120°	>0.5	Aluminum	D75	D84*H40
LED-RA03-5W	5W	SMD2835	400	120°	>0.5	Aluminum	D75	84*84*40
LED-RA04-7W	7W	SMD2835	560	120°	>0.5	Aluminum	D75	84*84*40




LED-RA01-5W
LED-RA02-7W



LED-RA03-5W
LED-RA04-7W




3000K 4000K 6500K




Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-RA01-5W	5W	SMD2835	400	120°	>0.5	Aluminum	D75	D84*H40
LED-RA02-7W	7W	SMD2835	560	120°	>0.5	Aluminum	D75	D84*H40
LED-RA03-5W	5W	SMD2835	400	120°	>0.5	Aluminum	D75	84*84*40
LED-RA04-7W	7W	SMD2835	560	120°	>0.5	Aluminum	D75	84*84*40



LED-RP02-3.5W



Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-RP03-5W	5W	SMD2835	450	120°	>0.5	PC	D68	D85*H30
LED-RP04-5W	5W	SMD2835	450	120°	>0.5	PC	D68	85*85*30



WORKS WITH amazon Alexa Google Assistant



Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-RP01-3.5W	3.5W	SMD2835	300	120°	>0.5	PBT	D68	D85*H23
LED-RP02-3.5W	3.5W	SMD2835	300	120°	>0.5	PBT	D68	85*85*23
LED-RP03-5W	5W	SMD2835	450	120°	>0.5	PC	D68	D85*H30
LED-RP04-5W	5W	SMD2835	450	120°	>0.5	PC	D68	85*85*30



LED-DC-R

LED-DC-S

CCT Changeable

3000K 4000K 6500K

AC 220-240V ≥80 30,000h -20°+40° 15,000 90% Energy saving CE



Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-DC-3W(R/S)	3W	SMD2835	240	36°	>0.5	Plastic	D55	D70*H42
LED-DC-5W(R/S)	5W	SMD2835	400	36°	>0.5	Plastic	D80	D90*H42
LED-DC-7W(R/S)	7W	SMD2835	560	36°	>0.5	Plastic	D80	D90*H42
LED-DC-9W(R/S)	9W	SMD2835	720	36°	>0.5	Plastic	D95	D118*H53
LED-DC-12W(R/S)	12W	SMD2835	960	36°	>0.5	Plastic	D115	D140*H53



LED-DC-R

LED-DC-S

WiFi

3000K 4000K 6500K

AC 220-240V ≥80 30,000h -20°+40° 15,000 90% Energy saving CE

Powered By **tuya** intelligence inside

WORKS WITH amazon Alexa Google Assistant




Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-DC-5W(R/S)	5W	SMD2835	400	36°	>0.5	Plastic	D80	D90*H42



CCT Changeable



3000K 4000K 6500K



Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-DA-5W(R/S)	5W	2835SMD	400	36°	>0.5	PC	D75	D95*H45




IP44

CCT Changeable



3000K 4000K 6500K





Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-YDU-R-7W	7W	SMD2835	560	120°	>0.9	Plastic+PC	D70	D86*H30
LED-YDU-S-7W	7W	SMD2835	560	120°	>0.9	Plastic+PC	D70	86*86*30



CCT Changeable

3000K 4000K 6500K





Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-YDT-7W	7W	SMD2835	560	120°	>0.9	Plastic+PC	D90	D113*30
LED-YDT-10W	10W	SMD2835	850	120°	>0.9	Plastic+PC	D120	D148*30
LED-YDT-15W	15W	SMD2835	1300	120°	>0.9	Plastic+PC	D145	D175*30
LED-YDT-22W	22W	SMD2835	2000	120°	>0.9	Plastic+PC	D190	D220*30



CCT Changeable



3000K 4000K 6500K

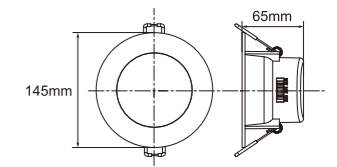

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-DE-8W	8W	SMD2835	640	120°	>0.5	Plastic+Aluminum	D70	D95*H50
LED-DE-10W	10W	SMD2835	800	120°	>0.5	Plastic+Aluminum	D90	D113*H57
LED-DE-12W	12W	SMD2835	960	120°	>0.5	Plastic+Aluminum	D120	D145*H65



CCT
Changeable




CCT
Changeable

IP44


IP44

3000K 4000K 6500K



Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-YDV-10W	10W	SMD2835	800	120°	>0.9	Plastic+PC	D90	D113*H87
LED-YDV-10W-COB	10W	COB	800	120°	>0.9	Plastic+PC	D90	D113*H87

3000K 4000K 6500K






• WORKS WITH



Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-YDV-10W	10W	SMD2835	800	120°	>0.9	Plastic+PC	D90	D113*H87
LED-YDV-10W-COB	10W	COB	800	120°	>0.9	Plastic+PC	D90	D113*H87



3000K 4000K 6500K

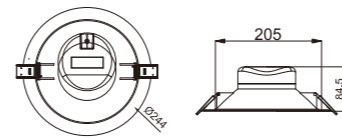





Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-DYT-7W	7W	SMD2835	590	90°	>0.9	PC	D70	D95*H58
LED-DYT-9W	9W	SMD2835	800	90°	>0.9	PC	D92	D113*H59
LED-DYT-14W	14W	SMD2835	1260	90°	>0.9	PC	D130	D145*H69
LED-DYT-17W	17W	SMD2835	1530	90°	>0.9	PC	D105	D174*H69
LED-DYT-25W	25W	SMD2835	2450	90°	>0.9	PC	D205	D224*H85



WORKS WITH amazon Alexa Google Assistant



3000K 4000K 6500K



Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-DZN-10W(wifi)	10W	SMD2835	850	120°	>0.5	Plastic+AL	D90	D120*48
LED-DZN-10W(Bluetooth)	10W	SMD2835	850	120°	>0.5	Plastic+AL	D90	D120*48



3000K 4000K 6500K

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-YDR-6W-A	6W	SMD2835	420	120°	>0.5	Aluminum	Ø75	Ø110*50
LED-YDR-8W-A	8W	SMD2835	560	120°	>0.5	Aluminum	Ø75	Ø110*50
LED-YDR-6W-B	6W	SMD2835	420	120°	>0.5	Aluminum	Ø75	Ø110*50
LED-YDR-8W-B	8W	SMD2835	560	120°	>0.5	Aluminum	Ø75	Ø110*50



3000K 4000K 6500K

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-YDR-6W-C	6W	COB	420	120°	>0.5	Aluminum	Ø75	Ø110*50
LED-YDR-8W-C	8W	COB	560	120°	>0.5	Aluminum	Ø75	Ø110*50



3000K 4000K 6500K

AC 220-240V ≥80 30.000h -20°+40° 15.000 90%

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-YDS-6W	6W	2835SMD	540	40°	>0,5	Plastic+PC	D68	D90*H62.7
LED-YDS-9W	9W	2835SMD	810	40°	>0,9	Plastic+PC	D83	D105*H72.4



3000K 4000K 6500K

AC 220-240V ≥80 30.000h -20°+40° 15.000 90%



Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-DK-6W(White/Black)	6W	2835SMD	480	40°	>0,9	PC	D70	D81*79
LED-DK-9W(White/Black)	9W	2835SMD	650	40°	>0,9	PC	D93	D103*91
LED-DK-12W(White/Black)	12W	2835SMD	1080	40°	>0,9	PC	D125	D140*102

LED Down Light



CCT
Changeable

3000K 4000K 6500K

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-DH-8W	8W	SMD2835	640	120°	>0.9	Plastic+Aluminum D70	D94*H32	
LED-DH-10W	10W	SMD2835	800	120°	>0.9	Plastic+Aluminum D90	D113*H32	

LED Down Light



CCT
Changeable

3000K 4000K 6500K


Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-YDW-10W	10W	SMD2835	850	120°	>0.9	Plastic+Aluminum D90	D113.5*H49.7	
LED-YDW-10W-COB	10W	COB	850	120°	>0.9	Plastic+Aluminum D90	D113.5*H49.7	



UGR<19
SDCM<4

3000K 4000K 6500K

AC 180-265V ≥80 30,000h -20°+40° 15,000 90%

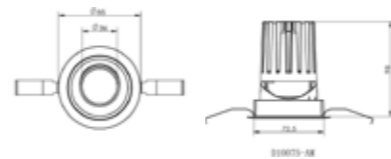

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-DP-7W	7W	SMD2835	500	40°	>0.5	Plastic	Ø73-78	Ø85*79
LED-DP-10W	10W	SMD2835	850	40°	>0.5	Plastic	Ø73-78	Ø85*98
LED-DP-10W	10W	SMD2835	850	40°	>0.5	Plastic	Ø90-95	Ø105*88
LED-DP-15W	15W	SMD2835	1275	40°	>0.5	Plastic	Ø90-95	Ø105*113




UGR<19

3000K 4000K 6500K


AC 220-240V ≥80 30,000h -20°+40° 15,000 90%



Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-YDQ-6W	6W	2835SMD	490	40°	>0.5	Aluminum	D68	D95*H57
LED-YDQ-10W	10W	2835SMD	880	40°	>0.9	Aluminum	D90	D113*H68.5
LED-YDQ-15W	15W	2835SMD	1320	40°	>0.9	Aluminum	D120	D145*H81.8
LED-YDQ-20W	20W	2835SMD	1800	40°	>0.9	Aluminum	D145	D174*H88.8
LED-YDQ-28W	28W	2835SMD	2500	40°	>0.9	Aluminum	D195	D232*H112.8
LED-YDQ-35W	35W	2835SMD	3150	40°	>0.9	Aluminum	D195	D232*H112.8





3000K 4000K 6500K




Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-DG-7W	7W	SMD2835	490	120°	>0.5	Plastic	D75	D95*H27
LED-DG-10W	10W	SMD2835	700	120°	>0.5	Plastic	D90	D114*H27
LED-DG-12W	12W	SMD2835	840	120°	>0.5	Plastic	D110	D140*H29
LED-DG-18W	18W	SMD2835	1260	120°	>0.5	Plastic	D155	D190*H29
LED-DG-24W	24W	SMD2835	1680	120°	>0.5	Plastic	D190	D230*H29


3000K 4000K 6500K

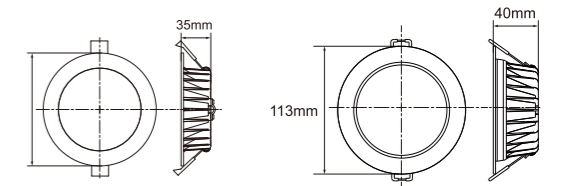

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-DI-10W	10W	SMD2835	700	120°	>0.9	Aluminum	D70	D98*H35
LED-DI-12W	12W	SMD2835	840	120°	>0.9	Aluminum	D85	D113*H35

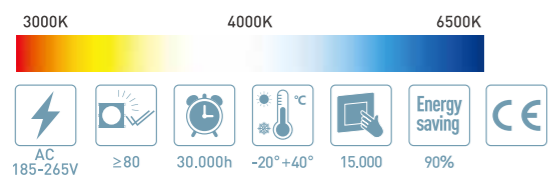

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-RA05/06/07/08-7W	7W	COB	560	36°	>0.5	Aluminum	Ø75	Ø85*70
LED-RA05/06/07/08-9W	9W	COB	720	36°	>0.5	Aluminum	Ø75	Ø85*70
LED-RA05/06/07/08-12W	12W	COB	960	36°	>0.5	Aluminum	Ø75	Ø85*70

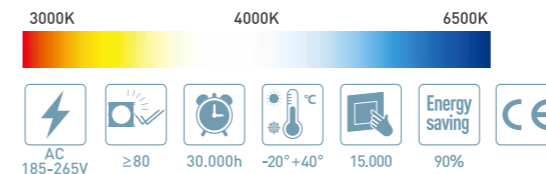

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-DL-5W-A/B/C	5W	COB	400	24°	>0.5	Aluminum	D70/D60/D75	D85/D75/D85
LED-DL-8W-A/B/C	8W	COB	640	24°	>0.5	Aluminum	D75/D70/D85	D95/D85/D98
LED-DL-12W-A/B/C	12W	COB	960	24°	>0.5	Aluminum	D75/D75/D85	D95/D85/D98



3000K 4000K 6500K

AC 85-265V ≥80 30.000h -20°+40° 15.000 90%



Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-DO-10W	10W	SMD2835	750	120°	>0.5	Aluminum	D90	D105*H40
LED-DO-16W	16W	SMD2835	1200	120°	>0.5	Aluminum	D120	D145*H43
LED-DO-24W	24W	SMD2835	1800	120°	>0.5	Aluminum	D175	D198*H45



3000K 4000K 6500K

AC 85-265V ≥80 30.000h -20°+40° 15.000 90%

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-DJ-6W	6W	SMD2835	390	120°	>0.5	Aluminum	D80	D100*H35
LED-DJ-9W	9W	SMD2835	630	120°	>0.5	Aluminum	D100	D120*H38
LED-DJ-15W	15W	SMD2835	1050	120°	>0.5	Aluminum	D120	D145*H40
LED-DJ-20W	20W	SMD2835	1400	120°	>0.5	Aluminum	D150	D180*H45
LED-DJ-24W	24W	SMD2835	1680	120°	>0.5	Aluminum	D200	D225*H48



LED-DM



3000K 4000K 6500K

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-DM-8W	8W	COB	560	120°	>0.5	Aluminum	D70	D90*H29
LED-DM-10W	10W	COB	700	120°	>0.5	Aluminum	D90	D117*H33
LED-DM-15W	15W	COB	1050	120°	>0.5	Aluminum	D140	D160*H35
LED-DM-30W	30W	COB	2100	120°	>0.5	Aluminum	D200	D227*H36





3000K 4000K 6500K



Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-DN-30W	30W	COB	2400	60°	>0.9	Aluminum	D140	D167*H99
LED-DN-40W	40W	COB	3200	60°	>0.9	Aluminum	D165	D195*H109
LED-DN-60W	60W	COB	4800	60°	>0.9	Aluminum	D200	D230*H128
LED-DN-80W	80W	COB	6400	60°	>0.9	Aluminum	D200	D230*H128



Item No.	Lamp Holde	Material	Cut out [mm]	Size [mm]
FR-01	GU10	Steel frame+steel hood	D75	D85*H110
FR-02	GU10	Steel frame+steel hood	D75	D85*H110
FR-03	GU10	Aluminum bezel+steel cansiter	D75	D85*H120
FR-04	GU10	Aluminum bezel+steel cansiter	D80	D85*H130



Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-FP01-8W	8W	COB	640	48°	>0.5	Aluminum	D85	D100*H75
LED-FP02-8W	8W	COB	640	48°	>0.5	Aluminum	D70	D86*H68
LED-FP03-8W	8W	COB	640	48°	>0.5	Aluminum	D90	D100*H90
LED-FP04-8W	8W	COB	640	48°	>0.5	Aluminum	D75	D86*H80

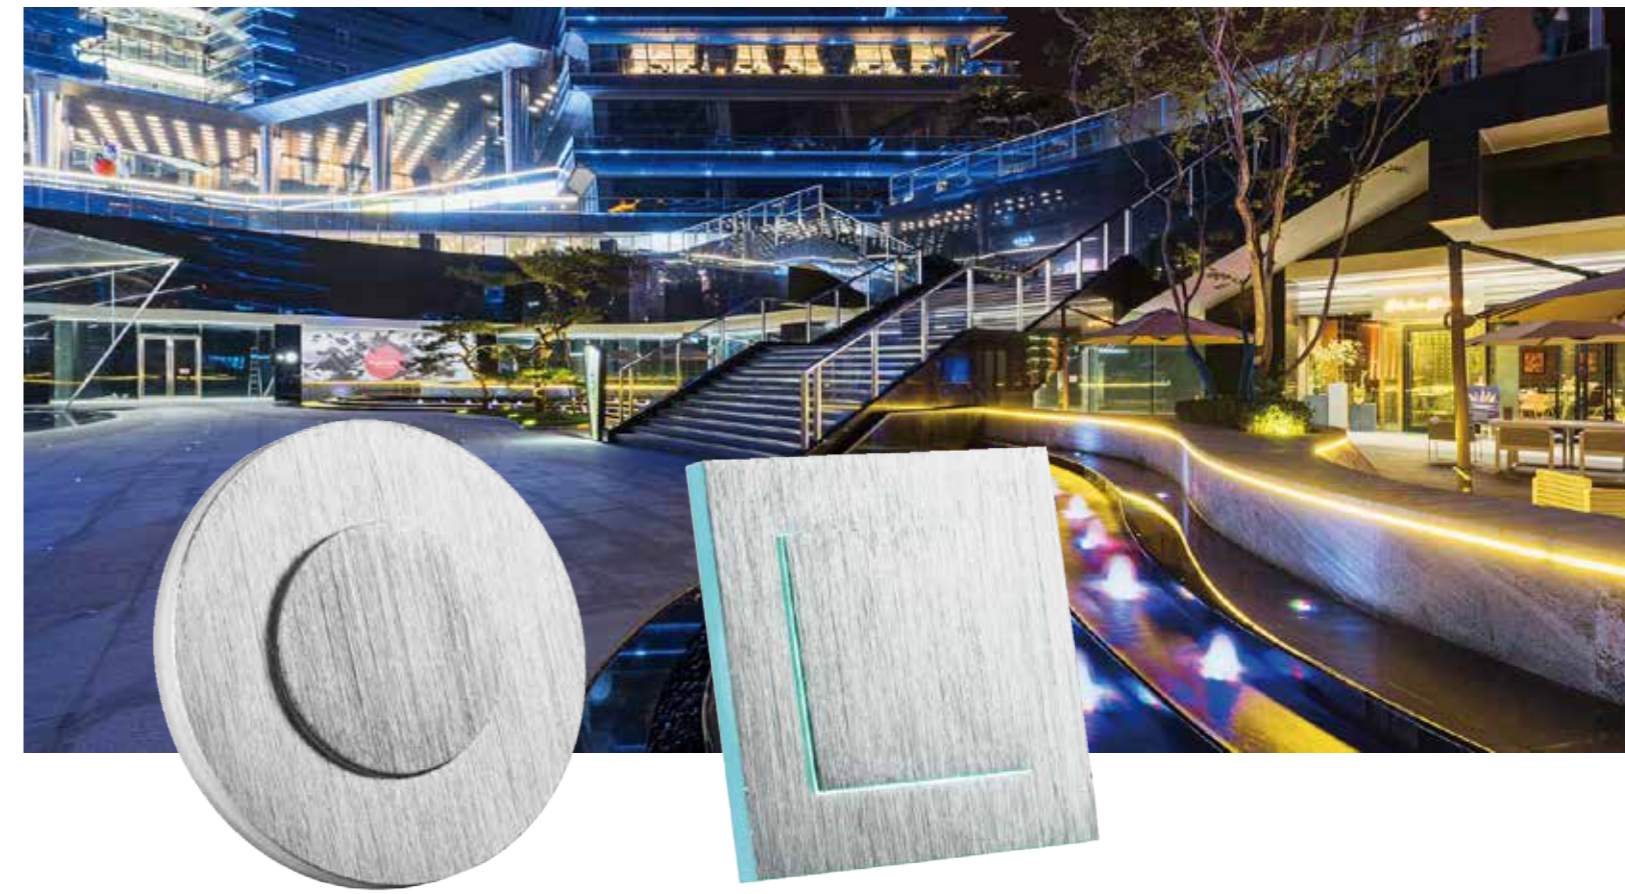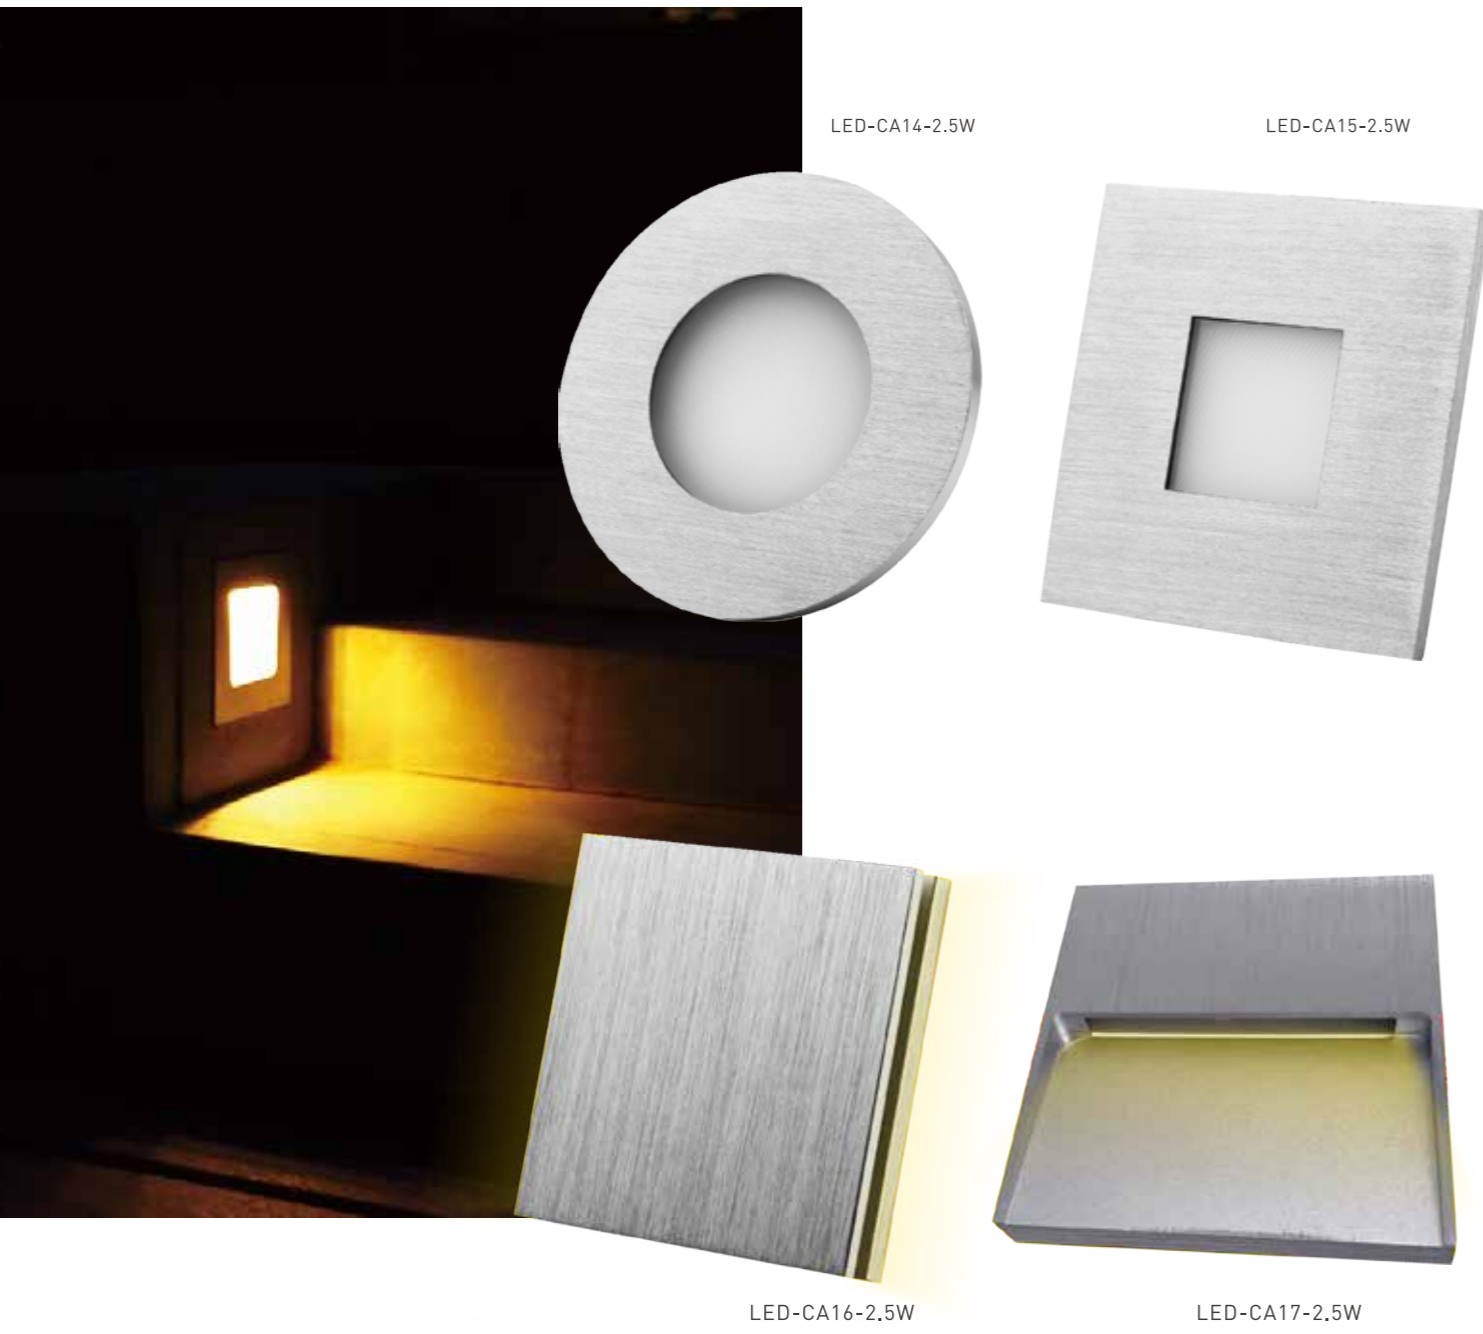

3000K 4000K 6500K


Item No.	Wattage [W]	LED	Beam angle	Material	Cut out [mm]	Size [mm]
LED-CA14-2.5W	2.5W	SMD2835	120°	Aluminum	Ø58	80*80*40
LED-CA15-2.5W	2.5W	SMD2835	120°	Aluminum	Ø58	80*80*35
LED-CA16-2.5W	2.5W	SMD2835	120°	Aluminum	Ø58	Ø80*35
LED-CA17-2.5W	2.5W	SMD2835	120°	Aluminum	Ø58	80*80*35

LED-CA01-2.5W LED-CA02-2.5W

LED-CA03-1.5W LED-CA04-1.5W

3000K 4000K 6500K

Item No.	Wattage [W]	LED	Beam angle	Material	Cut out [mm]	Size [mm]
LED-CA01-2.5W	2.5W	SMD2835	360°	Aluminum	Ø58	Ø80*37
LED-CA02-2.5W	2.5W	SMD2835	360°	Aluminum	Ø58	80*80*35
LED-CA03-1.5W	1.5W	SMD2835	360°	Aluminum	Ø58	Ø80*37
LED-CA04-1.5W	1.5W	SMD2835	360°	Aluminum	Ø58	80*80*37

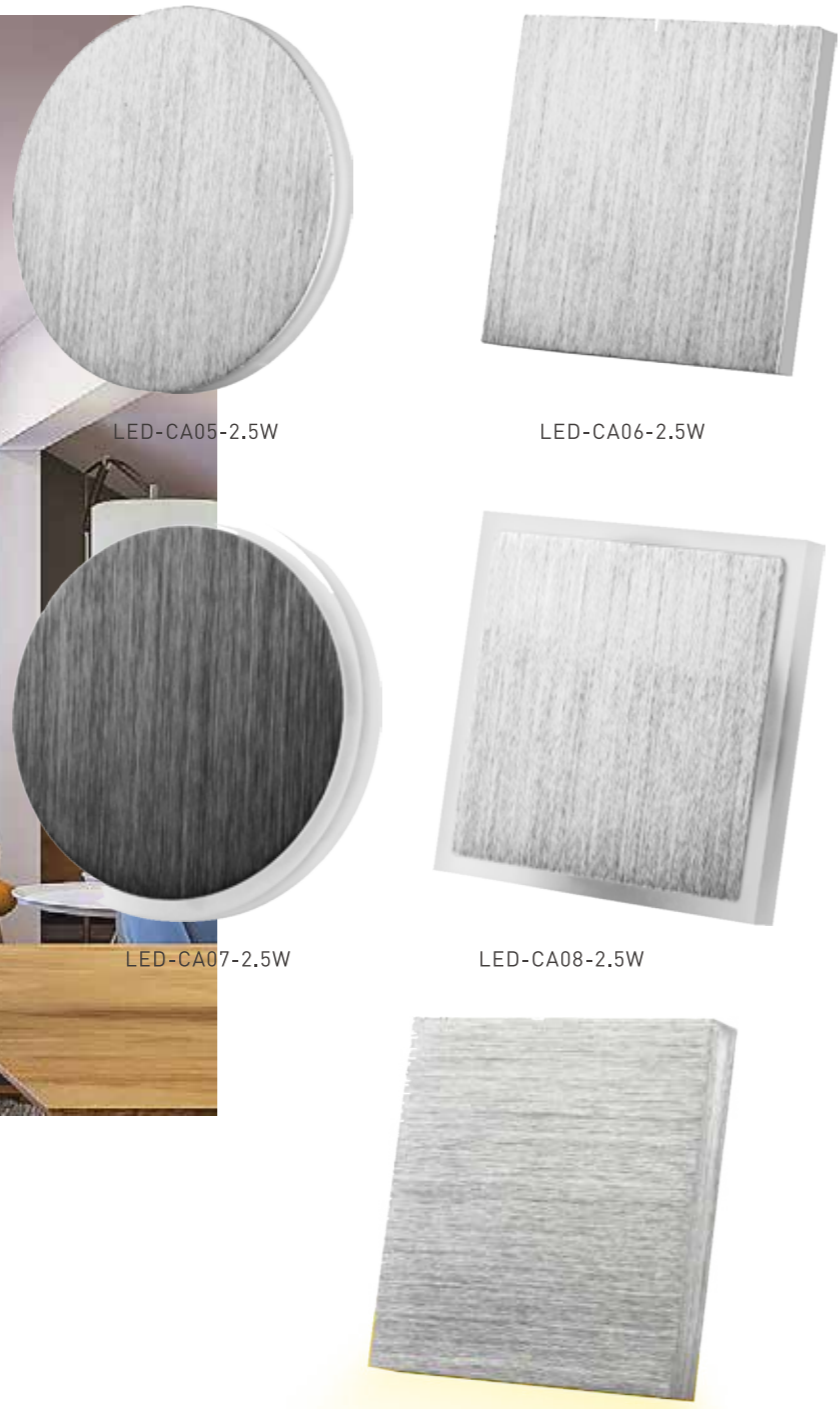

3000K 4000K 6500K

Item No.	Wattage [W]	LED	Beam angle	Material	Cut out [mm]	Size [mm]
LED-CA05-2.5W	2.5W	SMD2835	360°	Aluminum	Ø58	Ø80*35
LED-CA06-2.5W	2.5W	SMD2835	360°	Aluminum	Ø58	80*80*35
LED-CA07-2.5W	2.5W	SMD2835	360°	Aluminum	Ø58	Ø80*35
LED-CA08-2.5W	2.5W	SMD2835	360°	Aluminum	Ø58	80*80*35
LED-CA09-2.5W	2.5W	SMD2835	120°	Aluminum	Ø58	90*90*40



3000K 4000K 6500K

Item No.	Wattage [W]	LED	Beam angle	Material	Cut out [mm]	Size [mm]
LED-CA10-2.5W	2.5W	SMD2835	120°	Aluminum	Ø58	Ø75*43
LED-CA11-2.5W	2.5W	SMD2835	120°	Aluminum	Ø58	Ø75*47
LED-CA12-2.5W	2.5W	SMD2835	120°	Aluminum	Ø58	Ø75*47
LED-CA13-2.5W	2.5W	SMD2835	120°	Aluminum	Ø58	Ø75*47



• Installation

3000K 4000K 6500K

AC 100-240V ≥80 30.000h -20°+40° 15.000 90%

Energy saving CE



With Built-in Box

Item No.	Wattage [W]	LED	Beam angle	Material	Cut out [mm]	Size [mm]
LED-CP03-3W	3W	SMD2835	120°	PC+Stainless cover	Ø75	85*85*36
LED-CP03-3W(CCT)	3W	SMD2835	120°	PC+Stainless cover	Ø75	85*85*36

• Installation

3000K 4000K 6500K


AC 100-240V ≥80 30.000h -20°+40° 15.000 90%

Energy saving CE



With Built-in Box



Item No.	Wattage [W]	LED	Beam angle	Material	Cut out [mm]	Size [mm]
LED-CP04-3W	3W	SMD2835	120°	PC+Stainless cover	Ø90*53	107*67*30
LED-CP04-3W(CCT)	3W	SMD2835	120°	PC+Stainless cover	Ø90*53	107*67*30
LED-CP04-1.5W(Energy)	1.5W	SMD2835	120°	PC+Stainless cover	Ø90*53	107*67*30

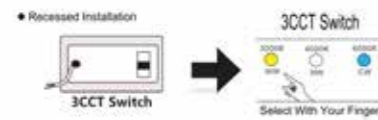


- AC 100-240V
- ≥80
- 30,000h
- 20°+40°
- 15,000
- 90%
- Energy saving
- CE



Item No.	Wattage [W]	LED	Beam angle	Material	Cut out [mm]	Size [mm]
LED-CP05-5.5W(CCT)	5.5W	SMD2835	120°	PC+Stainless cover	Ø159*55	180*180*46
LED-CP05-5.5W(CCT+DIM)	5.5W	SMD2835	120°	PC+Stainless cover	Ø159*55	180*180*46
LED-CP05-5.5W(Emergency)	5.5W	SMD2835	120°	PC+Stainless cover	Ø159*55	180*180*46

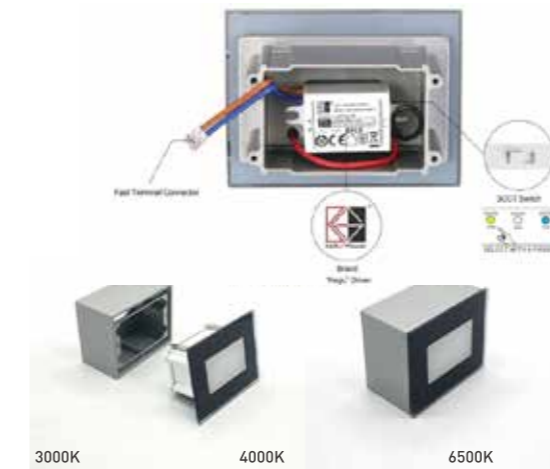

- AC 100-240V
- ≥80
- 30,000h
- 20°+40°
- 15,000
- 90%
- Energy saving
- CE

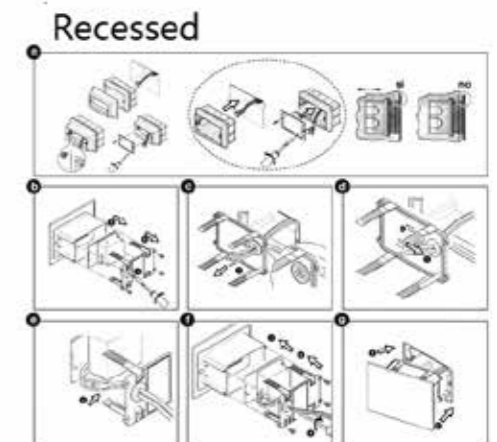

Item No.	Wattage [W]	LED	Beam angle	Material	Cut out [mm]	Size [mm]
LED-CA18-3W(CCT)	3W	SMD2835	120°	PC+Stainless cover	Ø90*53	107*67*30
LED-CA19-3W(CCT)	3W	SMD2835	120°	PC+Stainless cover	Ø90*53	107*67*30
Surface mounted box				Aluminum		103*79*56



LED-CP06-1W



LED-CP07-2W




LED-CP08-3W




LED-CP09-2W




LED-CP10-2W

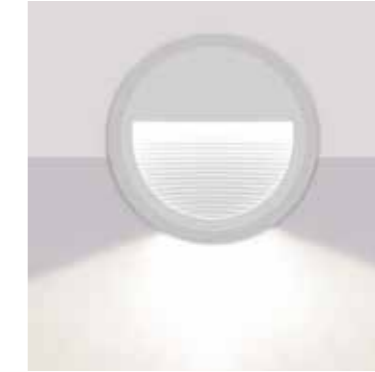

LED-CP11-2W

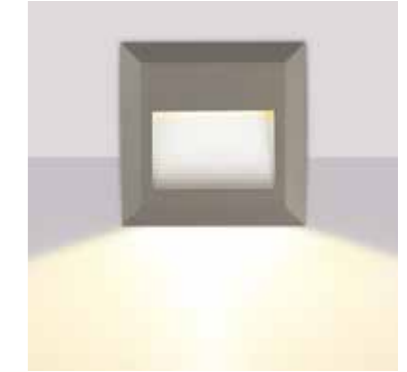


LED-CP12-2W

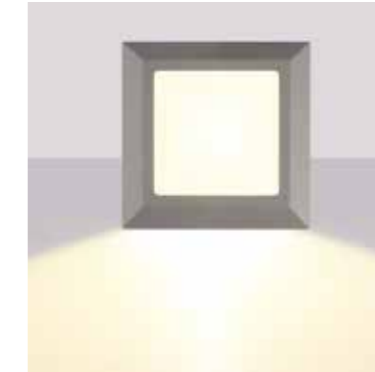


LED-CP15-5W



LED-CP14-5W

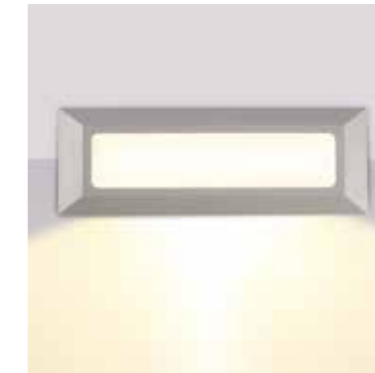


LED-CP16-5W

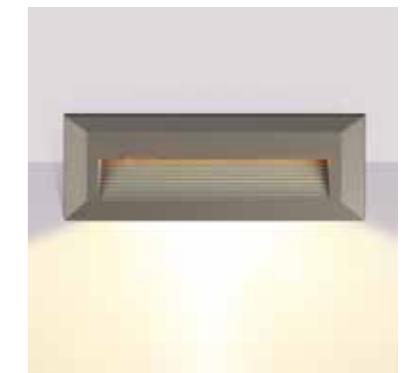


LED-CP13-3W

3000K 4000K 6500K



Item No.	Wattage [W]	LED	Material	Size [mm]
LED-CP06-1W	1W	SMD2835	PC	70*50*12
LED-CP07-2W	2W	SMD2835	PC	120*90*12
LED-CP08-3W	3W	SMD2835	PC	120*120*12
LED-CP09-2W	2W	SMD2835	PC	83*123*35
LED-CP10-2W	2W	SMD2835	PC	83*123*23

3000K 4000K 6500K



Item No.	Wattage [W]	LED	Material	Size [mm]
LED-CP11-2W	2W	SMD2835	PC	D150*H27
LED-CP12-2W	2W	SMD2835	PC	124*124*27
LED-CP13-3W	3W	SMD2835	PC	230*80*28
LED-CP14-5W	5W	SMD2835	PC	D150*H27
LED-CP15-5W	5W	SMD2835	PC	124*124*28
LED-CP16-5W	5W	SMD2835	PC	230*80*28



LED-CA22-3W

LED-CA23-3W

3000K 4000K 6500K

Item No.	Wattage [W]	LED	Material	Size [mm]
LED-CA20-2W	2W	SMD2835	Aluminum	D48*H82
LED-CA21-2W	2W	SMD2835	Aluminum	48*48*82
LED-CA22-3W	3W	SMD2835	Aluminum	D80*H51
LED-CA23-3W	3W	SMD2835	Aluminum	80*80*51



LED-CA24-3W

LED-CP19-3W

LED-CP18-3W

3000K 4000K 6500K

Item No.	Wattage [W]	LED	Material	Size [mm]
LED-CA24-3W	3W	SMD2835	Aluminum	84*84*46
LED-CP18-3W	3W	SMD2835	PC	86*86*47
LED-CP19-3W	3W	SMD2835	PC	85*85*42



LED-CP01-1W



LED-CP02-1W

3000K 4000K 6500K

Item No.	Wattage [W]	LED	Beam angle	Material	Cut out [mm]	Size [mm]
LED-CP01-1W	1W	SMD2835	60°	Aluminum	Ø58	86*86*40
LED-CP02-1W	1W	SMD2835	120°	Aluminum	Ø58	86*86*33



3000K 4000K 6500K

Item No.	Wattage [W]	LED	Material	Size [mm]
LED-CP17-3W	3W	SMD2835	PC	88*38*56

LED Track Light Series



The lamp body is made of high quality and high-end aluminum, with every single part well-designed and looking fashionable. It reaches the standard of European craft and world-class quality

The reflector is spin moulded by high quality aluminum. With anodizing craft and professional secondary optics design, the light is perfect, with parabola and curved surface design, the casting effect is better and the light loss is lower.

We use a new generation of high quality COB chip in big sizes. They are well sealed and packed, with high quality, stable color temperature, high brightness and uniform light.

We use constant current drivers, which is with stable high quality, longer lifespan, no stroboflash, and good protection to eyes.



Adjustable Beam Angle



LED Track Light

LED-TR-*W



LED-TRX-*W



3000K 4000K 6500K

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Size [mm]
LED-TR-40W	40W	COB	3200	20°-60°	>0.9	Aluminum	D101*H270
LED-TRX-30W	30W	COB	2400	15°/24°/38°/60°	>0.9	Aluminum	145*250*100



3000K 4000K 6500K

AC 180-265V ≥80 30,000h -20°+40° 15,000 90% Energy saving CE

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Size [mm]
LED-T4202-30W	30W	COB	2400	12°/24°	>0.9	Aluminum	D95*H134
LED-T4230-40W	40W	COB	3200	38°	>0.9	Aluminum	D49*H100
LED-T4200-30W	30W	COB	2400	12°/24°/38°	>0.9	Aluminum	D95*H110

3000K 4000K 6500K

AC 180-265V ≥80 30,000h -20°+40° 15,000 90% Energy saving CE

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Size [mm]
LED-T4233-12W	12W	COB	1140	15°/24°/36°	>0.9	Aluminum	D65*H115
LED-T4233-20W	20W	COB	1900	15°/24°/36°	>0.9	Aluminum	D75*H135
LED-T4233-30W	30W	COB	2850	15°/24°/36°	>0.9	Aluminum	D95*H145
LED-T4235-20W	20W	COB	1900	15°/24°/38°/60°	>0.9	Aluminum	D70*H130
LED-T4235-30W	30W	COB	2850	15°/24°/38°/60°	>0.9	Aluminum	D85*H154



LED-T4232-*W-A



LED-T4232-*W-B



LED-T4203-*W



LED-T4236-*W



LED-T4237-*W



LED-T4223-*W

3000K 4000K 6500K

AC 180-265V ≥80 30,000h -20°+40° 15,000 90% Energy saving CE

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Size [mm]
LED-T4232-12W-A/B	12W	COB	1140	15°/24°	>0.9	Aluminum	D63*H110
LED-T4232-20W-A/B	20W	COB	1900	15°/24°	>0.9	Aluminum	D86*H125
LED-T4232-30W-A/B	30W	COB	2850	15°/24°	>0.9	Aluminum	D95*H150
LED-T4232-40W-A/B	40W	COB	3800	15°/24°	>0.9	Aluminum	D105*H160
LED-T4232-50W-A/B	50W	COB	4750	15°/24°	>0.9	Aluminum	D114*H160
LED-T4237-30W	30W	COB	2850	15°/24°	>0.9	Aluminum	D95*H135

3000K 4000K 6500K

AC 180-265V ≥80 30,000h -20°+40° 15,000 90% Energy saving CE

Item No.	Wattage [W]	LED	Lumen [lm]	Power Factor	Beam angle	Material	Size [mm]
LED-T4203-10W	10W	COB	950	>0.9	36°/60°	Aluminum	D98*H90
LED-T4203-20W	20W	COB	1900	>0.9	36°/60°	Aluminum	D98*H110
LED-T4203-30W	30W	COB	2850	>0.9	36°/60°	Aluminum	D98*H130
LED-T4236-12W	12W	COB	1140	>0.9	15°/24°	Aluminum	D65*H120
LED-T4236-20W	20W	COB	1900	>0.9	15°/24°	Aluminum	D75*H140
LED-T4236-30W	30W	COB	2850	>0.9	15°/24°	Aluminum	D75*H180
LED-T4223-30W	30W	COB	2850	>0.9	24°	Aluminum	D92*H150




LED-T4246-30W



LED-T4240-W



LED-T4231-W

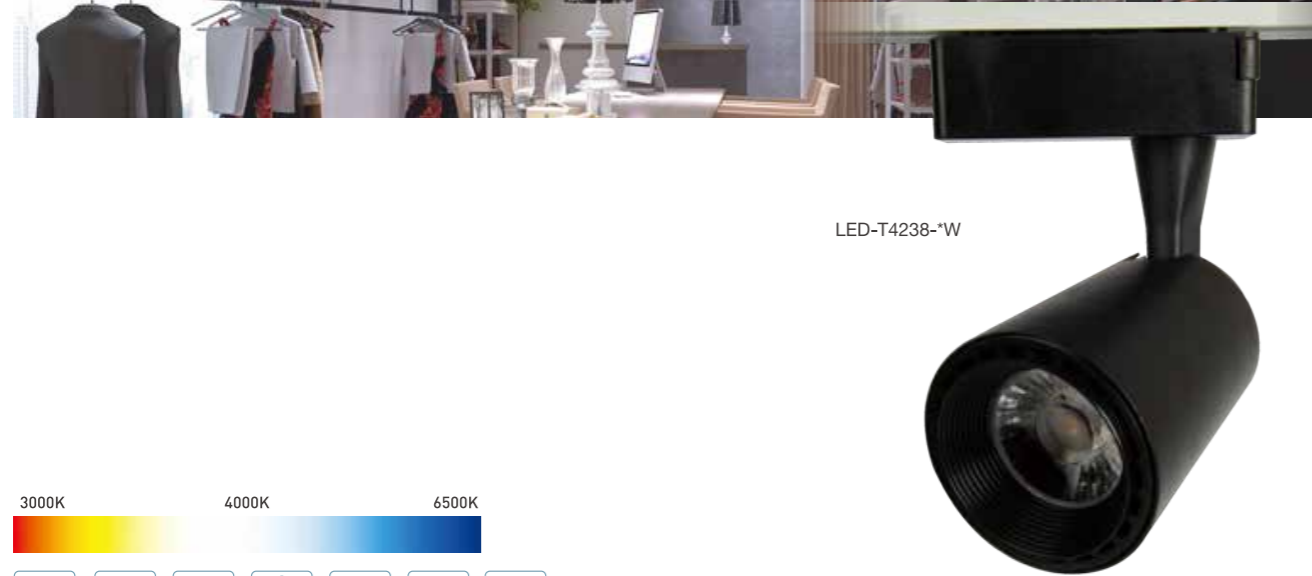


LED-T4238-W




LED-T4239-W




Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Size [mm]
LED-T4246-30W	30W	COB	2400	12°/24°/38°	>0.9	Aluminum	D90*H201
LED-T4238-12W	12W	COB	1140	24°	>0.9	Aluminum	D75*H115
LED-T4238-20W	20W	COB	1900	24°	>0.9	Aluminum	D100*H120
LED-T4238-30W	30W	COB	2850	24°	>0.9	Aluminum	D115*H155



Item No.	Wattage [W]	LED	Lumen [lm]	Power Factor	Beam angle	Material	Size [mm]
LED-T4240-12W	12W	COB	1140	>0.9	15°/24°	Aluminum	D56*H170
LED-T4231-10W	10W	COB	950	>0.9	15°/24°	Aluminum	D60*H90
LED-T4231-20W	20W	COB	1900	>0.9	15°/24°	Aluminum	D80*H130
LED-T4231-30W	30W	COB	2850	>0.9	15°/24°	Aluminum	D100*H140
LED-T4239-12W	12W	COB	1140	>0.9	24°	Aluminum	D67*H108
LED-T4239-20W	20W	COB	1900	>0.9	24°	Aluminum	D87.5*H123.5
LED-T4239-30W	30W	COB	2850	>0.9	24°	Aluminum	D108*H165
LED-T4239-40W	40W	COB	3800	>0.9	24°	Aluminum	D115*H124

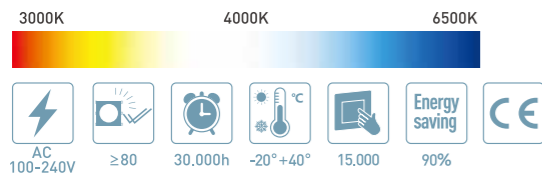

Item No.	Wattage [W]	LED	Lumen	Beam angle	Power Factor	Material	Size [mm]
LED-TL1530-5W	5W	SMD	400LM	50°	0.5	PC	59*59*162
LED-TL1530-7W	7W	SMD	560LM	50°	0.5	PC	59*59*162
LED-TL1540-9W	9W	SMD	720LM	50°	0.5	PC	76*76*163

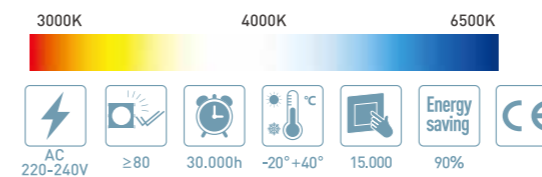

Item No.	Wattage [W]	LED	Lumen	Beam angle	Power Factor	Material	Size [mm]
LED-LTL002-15W	15W	COB	1600LM	24/36/48°	0.9	Aluminum	535*33*70
LED-LTL002-30W	30W	COB	2400LM	24/36/48°	0.9	Aluminum	935*33*70
LED-LTL002-45W	45W	COB	3200LM	24/36/48°	0.9	Aluminum	1330*33*70



3000K 4000K 6500K

Item No.	Wattage [W]	LED	Lumen	Beam angle	Power Factor	Material	Size [mm]
LED-TL019-20W	20W	COB	1600LM	15/24/38°	0.9	Aluminum	75*75*128
LED-TL019-30W	30W	COB	2400LM	15/24/38°	0.9	Aluminum	85*85*135
LED-TL019-40W	40W	COB	3200LM	15/24/38°	0.9	Aluminum	95*95*135



3000K 4000K 6500K





Item No.	Wattage [W]	LED	Lumen	Beam angle	Power Factor	Material	Size [mm]
LED-TL020-30W	30W	COB	3300LM	15/24/38/50°	0.9	Aluminum	140*140*45
LED-TL020-40W	40W	COB	4400LM	15/24/38/50°	0.9	Aluminum	140*140*45







3000K 4000K 6500K




AC 180-265V
 ≥80
 30,000h
 -20°+40°
 15,000
 90%
 Energy saving
 CE

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Size [mm]
LED-TDA-10W	10W	COB	800	15°/24°	>0.9	Aluminum	D40*H200
LED-TDA-15W	15W	COB	1200	15°/24°	>0.9	Aluminum	D50*H200
LED-TDB-10W	10W	COB	800	15°/24°/36°	>0.9	Aluminum	50*50*130
LED-TDB-20W	20W	COB	1600	15°/24°/36°	>0.9	Aluminum	60*60*150

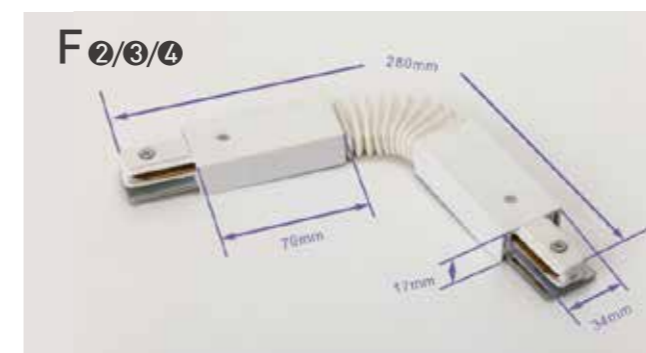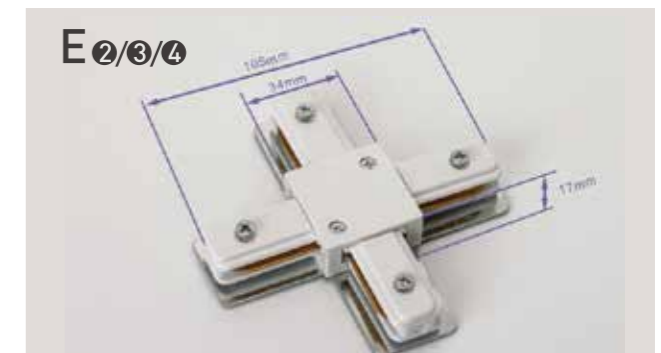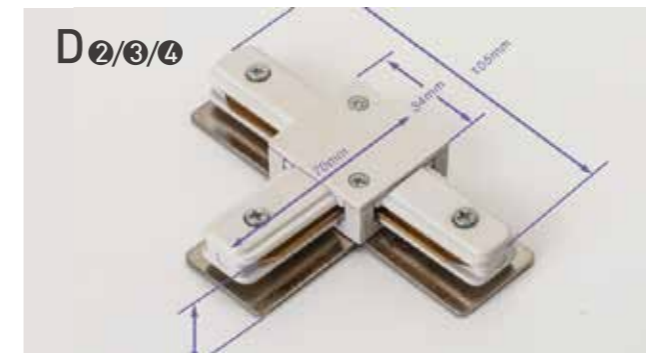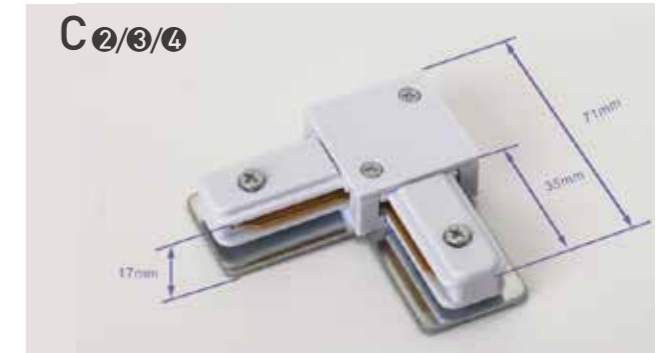


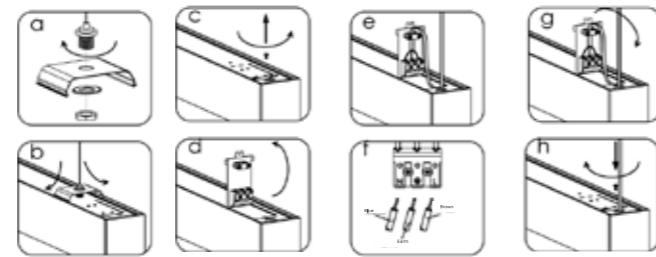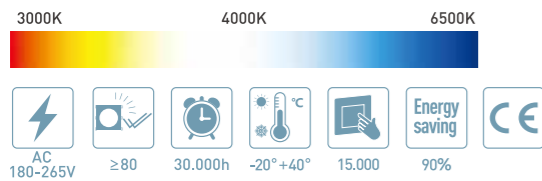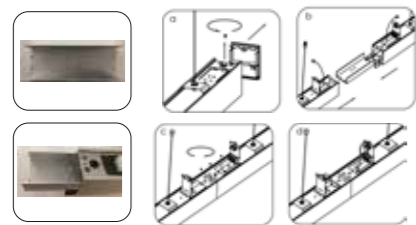

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Size [mm]
LED-OYG-40W	40W	SMD2835	4000	120°	>0.9	Aluminum	1217*64*75

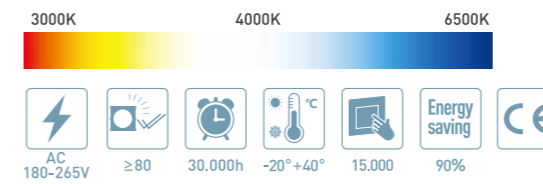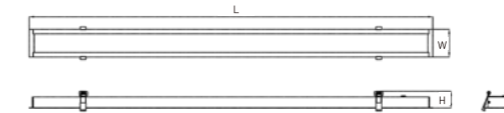



Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Cut out [mm]	Size [mm]
LED-OYY-40W	40W	SMD2835	4000	120°	>0.9	Aluminum	1125*68	1231*84*51

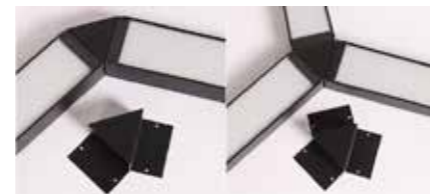

3000K 4000K 6500K

AC 220-240V ≥80 30.000h -20°+40° 15.000 90% Energy saving CE


Item No.	Wattage [W]	Lumen	Beam angle	Color Temperature	Material	Size [mm]
LED-YJT1-9W(A)	9W	702LM	120°	3000K/4000K/6500K	Aluminum+PC	580*80*50
LED-YJT1-9W(B)	9W	720LM	120°	3000K/4000K/6500K	Aluminum+PC	580*80*50
LED-YJT1-18W	18W	1440LM	120°	3000K/4000K/6500K	Aluminum+PC	1180*80*50
LED-YJT1-18W(EMC)	18W	1440LM	120°	3000K/4000K/6500K	Aluminum+PC	1180*80*50
LED-YJT1-24W(A)	24W	1440LM	120°	3000K/4000K/6500K	Aluminum+PC	1470*80*50
LED-YJT1-24W(B)	24W	1920LM	120°	3000K/4000K/6500K	Aluminum+PC	1470*80*50

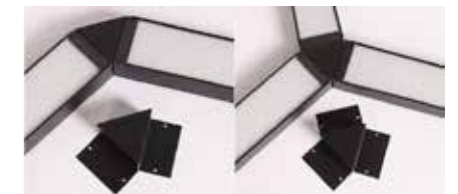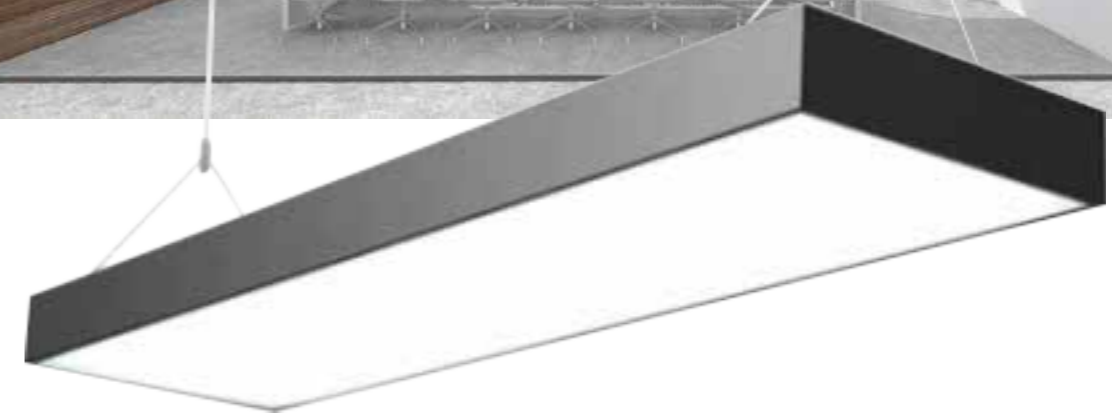


3000K 4000K 6500K

AC 220-240V ≥80 30.000h -20°+40° 15.000 90% Energy saving CE


Item No.	Wattage [W]	LED	Beam angle	Color Temperature	Material	Size [mm]
LED-YJT2-24W-(A)	24W	1990LM	120°	3000K/4000K/6500K	Aluminum+PC	1180*100*50
LED-YJT2-24W-(B)	24W	2040LM	120°	3000K/4000K/6500K	Aluminum+PC	1180*100*50
LED-YJT3-36W-(A)	36W	2040LM	120°	3000K/4000K/6500K	Aluminum+PC	1180*120*50
LED-YJT3-36W-(B)	36W	3232LM	120°	3000K/4000K/6500K	Aluminum+PC	1180*120*50
LED-YJT4-48W-(A)	48W	4320LM	120°	3000K/4000K/6500K	Aluminum+PC	1180*200*50
LED-YJT4-48W-(B)	48W	4400LM	120°	3000K/4000K/6500K	Aluminum+PC	1180*200*50

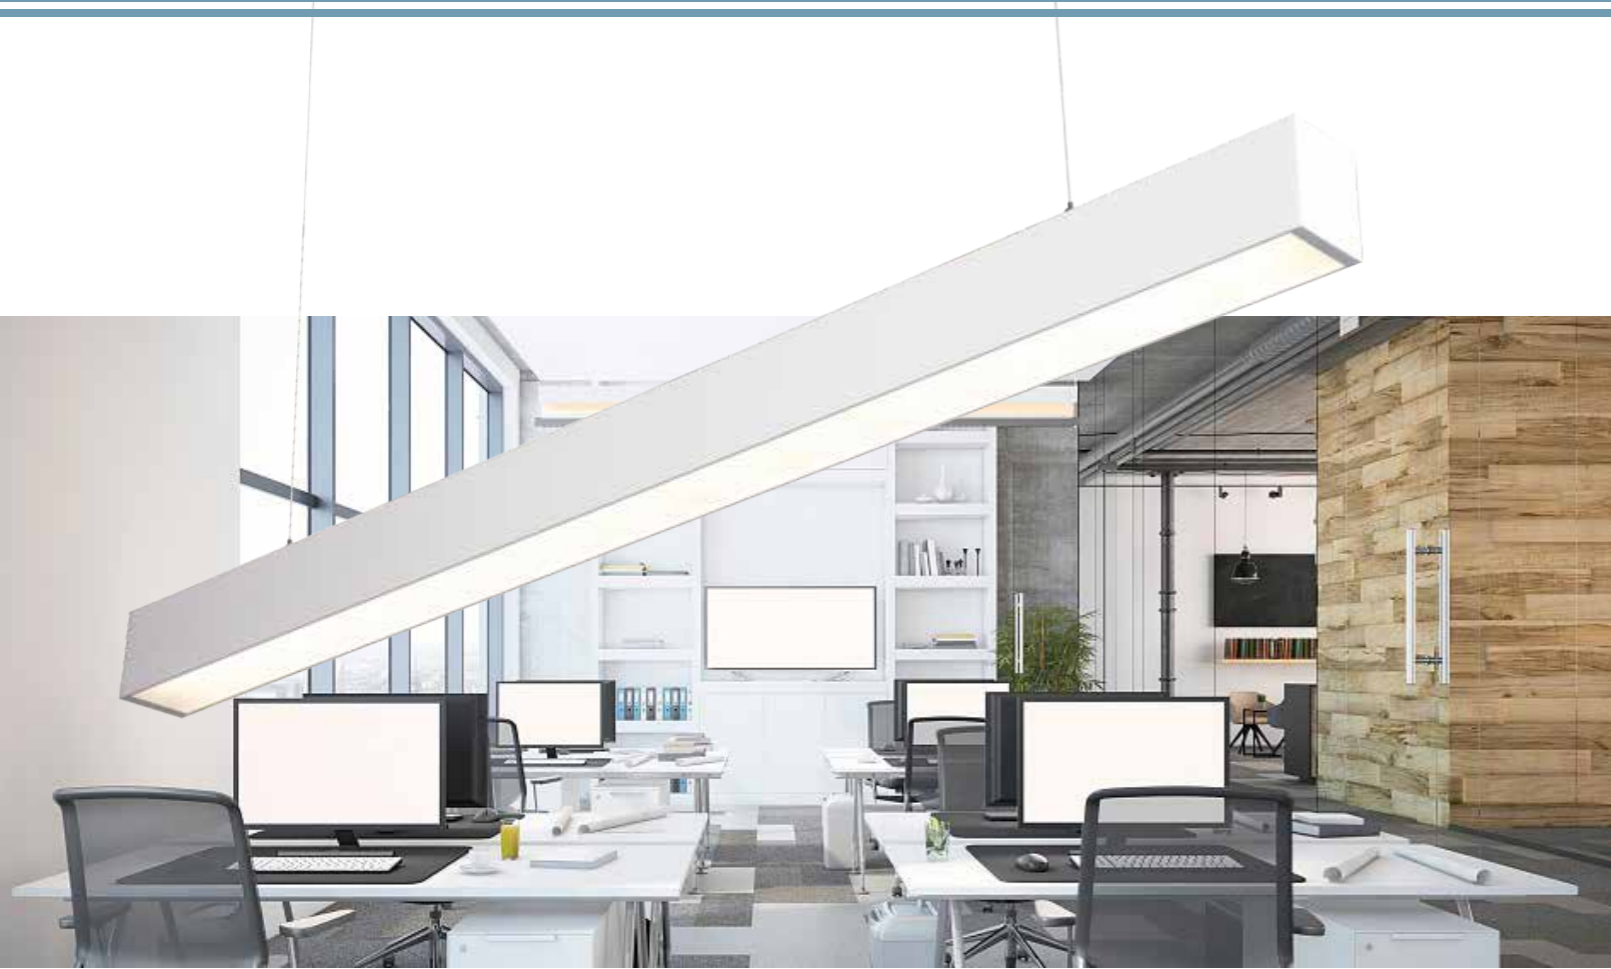

- UGR<19
- IK 08
- CCT
- 120lm/w

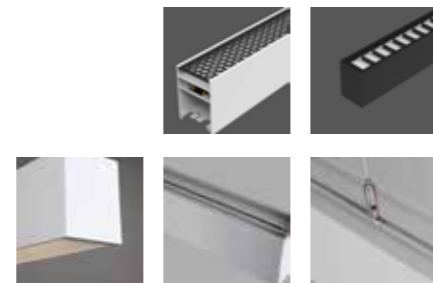

- UGR<19
- IK 08
- CCT
- 120lm/w

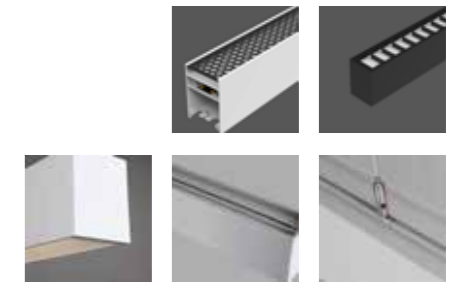


3000K 4000K 6500K

Item No.	Wattage [W]	LED	Lumen	Beam angle	Power Factor	Material	Size [mm]
LED-OL5070-24W	24W	SMD2835	2400LM	100°	0.9	Aluminum+PC	600*50*70
LED-OL5070-40W	40W	SMD2835	4000LM	100°	0.9	Aluminum+PC	1200*50*70
LED-OL5070-50W	50W	SMD2835	5000LM	100°	0.9	Aluminum+PC	1500*50*70
LED-OL5070-80W	80W	SMD2835	8000LM	100°	0.9	Aluminum+PC	3000*50*70

3000K 4000K 6500K


Item No.	Wattage [W]	LED	Lumen	Beam angle	Power Factor	Material	Size [mm]
LED-OL6378-24W	24W	SMD2835	2400LM	100°	0.9	Aluminum+PC	600*63*78
LED-OL6378-40W	40W	SMD2835	4000LM	100°	0.9	Aluminum+PC	1200*63*78
LED-OL6378-50W	50W	SMD2835	5000LM	100°	0.9	Aluminum+PC	1500*63*78
LED-OL6378-80W	80W	SMD2835	8000LM	100°	0.9	Aluminum+PC	3000*63*78

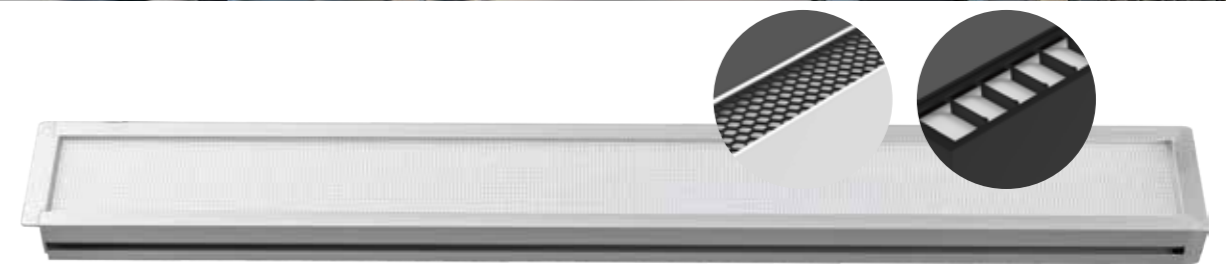

- UGR<19
- IK 08
- CCT
- 120lm/w

- UGR<19
- IK 08
- CCT
- 120lm/w

3000K 4000K 6500K




- AC 220-240V
- ≥80
- 30.000h
- 20°+40°
- 15.000
- Energy saving 90%
- CE



3000K 4000K 6500K



- AC 220-240V
- ≥80
- 30.000h
- 20°+40°
- 15.000
- Energy saving 90%
- CE



Item No.	Wattage [W]	LED	Lumen	Beam angle	Power Factor	Material	Size [mm]
LED-OL5070-24W-UGR	24W	SMD2835	2400LM	100°	0.9	Aluminum+PC	600*50*70
LED-OL5070-40W-UGR	40W	SMD2835	4000LM	100°	0.9	Aluminum+PC	1200*50*70
LED-OL5070-50W-UGR	50W	SMD2835	5000LM	100°	0.9	Aluminum+PC	1500*50*70
LED-OL5070-80W-UGR	80W	SMD2835	8000LM	100°	0.9	Aluminum+PC	3000*50*70



Item No.	Wattage [W]	LED	Lumen	Beam angle	Power Factor	Material	Size [mm]
LED-OL9035-24W	24W	SMD2835	2400LM	100°	0.9	Aluminum+PC	600*90*35
LED-OL9035-40W	40W	SMD2835	4000LM	100°	0.9	Aluminum+PC	1200*90*35
LED-OL9035-50W	50W	SMD2835	5000LM	100°	0.9	Aluminum+PC	1500*90*35
LED-OL9035-80W	80W	SMD2835	8000LM	100°	0.9	Aluminum+PC	3000*90*35















LED-OYL



LED-OYM

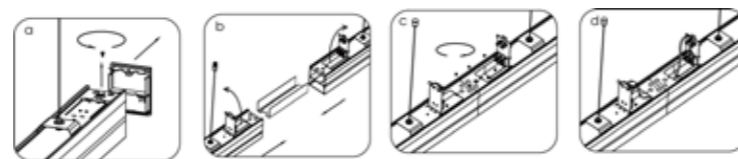

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Size [mm]
LED-OYL-32W	32W	SMD2835	2880	90°	>0,9	Aluminum	1131*50*75
LED-OYL-32W(CCT)	32W	SMD2835	2880	90°	>0,9	Aluminum	1131*50*75
LED-OYL-48W(Double Sided)	32+16W	SMD2835	4460	90°	>0,9	Aluminum	1131*50*75
LED-OYM-32W	32W	SMD2835	3500	60°	>0,9	Aluminum	1131*50*75
LED-OYM-32W(CCT)	32W	SMD2835	3500	60°	>0,9	Aluminum	1131*50*75
LED-OYM-48W(Double Sided)	32+16W	SMD2835	5200	60°	>0,9	Aluminum	1131*50*75

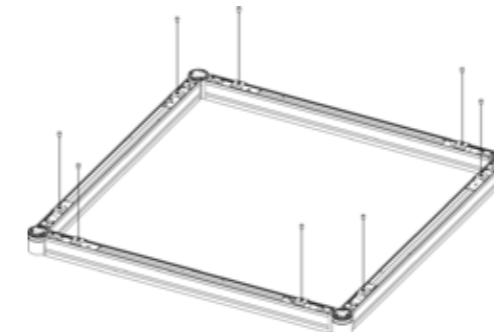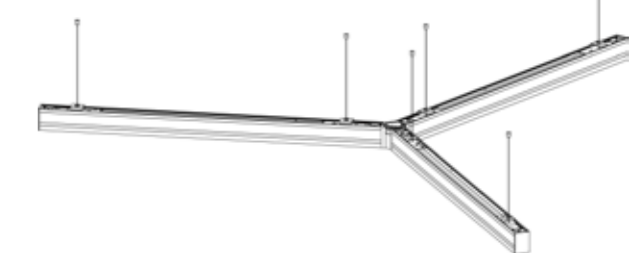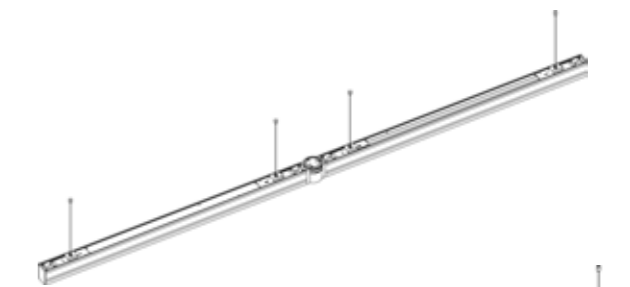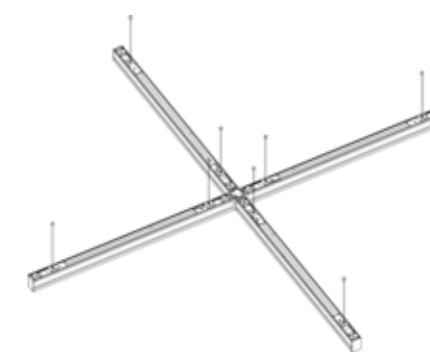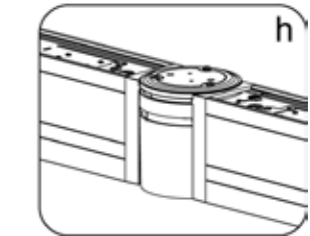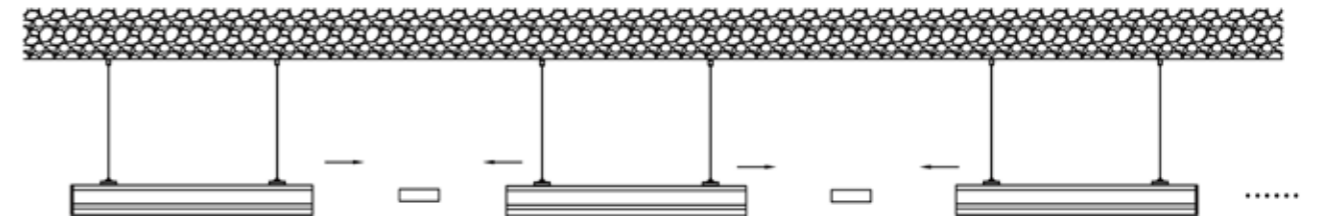



3000K 4000K 6500K



Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Size [mm]
LED-FE-4W	4W	SMD2835	320	120°	>0.5	PC	313*22*30
LED-FE-9W	9W	SMD2835	720	120°	>0.5	PC	573*22*30
LED-FE-13W	13W	SMD2835	1040	120°	>0.5	PC	873*22*30
LED-FE-18W	18W	SMD2835	1440	120°	>0.5	PC	1173*22*30
LED-FE-22W	22W	SMD2835	1760	120°	>0.5	PC	1473*22*30
LED-FS-6W	6W	SMD2835	520	120°	>0.5	Aluminum	300*22*34
LED-FS-10W	10W	SMD2835	830	120°	>0.5	Aluminum	570*22*34
LED-FS-14W	14W	SMD2835	1320	120°	>0.5	Aluminum	870*22*34
LED-FS-19W	19W	SMD2835	1750	120°	>0.5	Aluminum	1170*22*34




3000K 4000K 6500K



Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Size [mm]
LED-FC-5W	5W	SMD2835	350	135°	>0.5	Plastic	300*22*34
LED-FC-10W	10W	SMD2835	700	135°	>0.5	Plastic	570*22*34
LED-FC-14W	14W	SMD2835	1000	135°	>0.5	Plastic	870*22*34
LED-FC-18W	18W	SMD2835	1260	135°	>0.5	Plastic	1170*22*34
LED-FD-4W	4W	SMD2835	360	120°	>0.5	Plastic	300*23*36
LED-FD-8W	8W	SMD2835	720	120°	>0.5	Plastic	570*23*36
LED-FD-12W	12W	SMD2835	1080	120°	>0.5	Plastic	870*23*36
LED-FD-16W	16W	SMD2835	1440	120°	>0.5	Plastic	1170*23*36




3000K 4000K 6500K

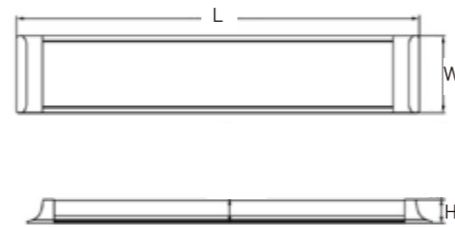

Item No.	Wattage [W]	LED	Lumen [lm]	Power Factor	Beam angle	Material	Size [mm]
LED-FB-9W	9W	SMD2835	720	120°	>0.5	Aluminum	300*75*25
LED-FB-18W	18W	SMD2835	1440	120°	>0.5	Aluminum	600*75*25
LED-FB-27W	27W	SMD2835	2160	120°	>0.9	Aluminum	900*75*25
LED-FB-36W	36W	SMD2835	2880	120°	>0.9	Aluminum	1200*75*25
LED-FB-45W	45W	SMD2835	3600	120°	>0.9	Aluminum	1500*75*25




3000K 4000K 6500K

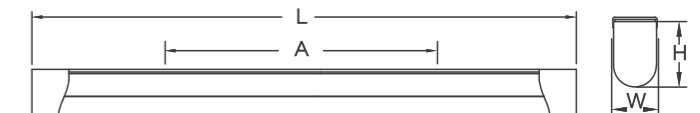

Item No.	Wattage [W]	LED	Lumen [lm]	Power Factor	Beam angle	Material	Size [mm]
LED-FF-10W	10W	SMD2835	900	120°	>0.9	AL+PC	634*28*44
LED-FF-20W	20W	SMD2835	1800	120°	>0.9	AL+PC	1234*28*44
LED-FF-24W	24W	SMD2835	2160	120°	>0.9	AL+PC	1534*28*44



3000K 4000K 6500K

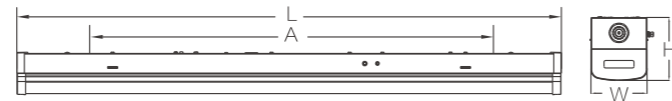

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Size [mm]
LED-FG-14W	14W	SMD2835	1400	140°	>0.9	Metal	630*75*85
LED-FG-30W	30W	SMD2835	3000	140°	>0.9	Metal	1230*75*85
LED-FG-40W	40W	SMD2835	4000	140°	>0.9	Metal	1518*75*85
LED-FG-55W	55W	SMD2835	5500	140°	>0.9	Metal	1818*75*85



3000K 4000K 6500K

Item No.	Wattage [W]	LED	Lumen [lm]	Beam angle	Power Factor	Material	Size [mm]
LED-FA-20W	20W	SMD5730	1800	120°	>0.5	Aluminum	565*75*35
LED-FA-40W	40W	SMD5730	3600	120°	>0.5	Aluminum	1175*75*35
LED-FA90-20W	20W	SMD5730	1800	120°	>0.5	Aluminum	565*65*40
LED-FA90-40W	40W	SMD5730	3600	120°	>0.5	Aluminum	1175*65*40
LED-FA-2*20W	40W	SMD5730	3600	120°	>0.5	Aluminum	565*100*40
LED-FA-2*40W	80W	SMD5730	7200	120°	>0.5	Aluminum	1175*100*40



3000K 4000K 6500K

AC 220-240V ≥80 30.000h -20°+40° 15.000 90% Energy saving CE



Item No.	Wattage [W]	LED	Lumen	Beam angle	Power Factor	Material	Size [mm]
LED-FL05B-4W	4W	SMD2835	400LM	120°	>0.5	Plastic	595*595*10
LED-FL05B-8W	8W	SMD2835	800LM	120°	>0.5	Plastic	595*595*10
LED-FL05B-12W	12W	SMD2835	1200LM	120°	>0.5	Plastic	595*595*10
LED-FL05B-14W	14W	SMD2835	1400LM	120°	>0.5	Plastic	595*595*10



3000K 4000K 6500K

AC 220-240V ≥80 30.000h -20°+40° 15.000 90% Energy saving CE



Item No.	Wattage [W]	LED	Lumen	Beam angle	Power Factor	Material	Size [mm]
LED-FL2356-8W	8W	SMD2835	640LM	120°	>0.5	Plastic	573*22*30
LED-FL2356-10W	10W	SMD2835	800LM	120°	>0.5	Plastic	873*22*30
LED-FL2356-14W	14W	SMD2835	1120LM	120°	>0.5	Plastic	1173*22*30
LED-FL2356-18W	18W	SMD2835	1440LM	120°	>0.5	Plastic	1473*22*30



DF>0.7

NEW ERP

3000K 4000K 6500K

Item No.	Wattage [W]	LED	Lumen	Beam angle	Power Factor	Material	Size [mm]
FLWY-18W	18W	SMD	1440LM	120°	0.5	PC	600*75*45
FLWY-36W	36W	SMD	2880LM	120°	0.5	PC	1200*75*45

